

EMBERGUARD · DESIGN PRECIS

EmberGuard design precis

Design Molecule Lab · designmolecule.com

DOCUMENT CONTROL

Document ID	EGD-PRC-001	Version	0.9
Status	Draft	Date	2026-10-02
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/emberguard		
Source	docs/02-concept.md @ uncommitted		

REVISION HISTORY

Version	Date	Author	Change
0.9	2026-10-02	Amish Chadha	Approved follow-ups carried out: sun shade (item 18) and 45 °C charge cut-off priced and modelled; enclosure temperature, shade wind load and the two paper studies from EGD-CAL-001 v0.6; cost \$707; drawing Rev P5
0.8	2026-10-02	Amish Chadha	Decisions of 2026-10-02 carried in: enclosure finish and siting, 45 °C charge limit, gutter guards, leeward wetting study, third sensor later, opt-in data sharing
0.7	2026-10-01	Amish Chadha	Budget treated as a value-engineering target
0.6	2026-10-01	Amish Chadha	Design made buildable (EGD-DDR-003); components, numbers and cost from EGD-CAL-001 v0.4; drawing at Rev P4; build plan and design decisions register added
0.5	2026-09-26	Amish Chadha	Budget approved by Amish (\$605)
0.4	2026-09-25	Amish Chadha	Recommendations accepted by Amish (DDR-002). Thermal sensors moved to gutter-corner pods, 2 K trigger,

			leeward-only spray rule, 10 Ah battery; numbers from EGD-CAL-001 v0.2
0.3	2026-09-25	Amish Chadha	TRL 3. Record Amish's decisions (EGD-DDR-001); numbers checked against EGD-CAL-001; gutter blind spot reported; parametric model, drawing EGD-DWG-001 and priced BOM
0.2	2026-09-25	Amish Chadha	Populate to TRL 2 (architecture, components, first-order numbers, safety, media)
0.1	2026-09-24	Amish Chadha	Initial scaffold


EmberGuard design precis

EmberGuard pairs a slim weather mast at one gable end with two small thermal sensor pods at the gable-end corners of the gutters. Each pod sits 200 mm beyond the end of its gutter and 500 mm above the lip and looks straight down the gutter, so a 32 x 24 pixel thermal array sees the debris inside it and the first metre of roof. The mast carries a cup anemometer, a wind vane, a humidity sensor and a small solar panel, and they decide when fire weather has arrived. When the system is armed and sees a hot spot or a burst of hot specks, it opens 12 V valves feeding a line of micro-sprinklers clipped to each gutter lip, wetting the gutter, fascia and first metre of roof. In wind, only the leeward line runs. The TRL 3 calculations (EGD-CAL-001 v0.3) confirm a steady 4 L/min draw, about 965 L per 4 h ember event, water at the farthest head 55 s after detection, a battery with a wide margin and a strong mast. They also show what is still missing. Hanger straps across the gutter shadow debris that sits deep in it beyond about 8 m. A 600 °C ember reaches the 2 K trigger to 8.8 m only when it is centred in a pixel. The leeward eave still gets far less than 5 mm/h in the 30 km/h design wind. Making the design buildable (EGD-DDR-003) added flanges, crossover plates, pod mounts, a valve board and fixings, so the priced kit now costs an estimated \$689 against the \$605 value-engineering target set on 2026-09-26, USD 84 over; the savings worth trying are in the design decisions register (EGD-DEC-001). The prototype build plan is EGD-BLD-001 (docs/05-build-plan.md). The general arrangement is drawing EGD-DWG-001 Rev P4 (cad/drawings/EGD-DWG-001.pdf), generated from cad/src/model.py . This revision records the recommendations Amish accepted on 2026-09-25 (EGD-DDR-002): the pods replace the ridge-line sensor head, which could not see into the gutters at all.

EmberGuard

github.com/BoujeeEnjinia1701/emberguard

CONCEPT, NOT FOR FABRICATION

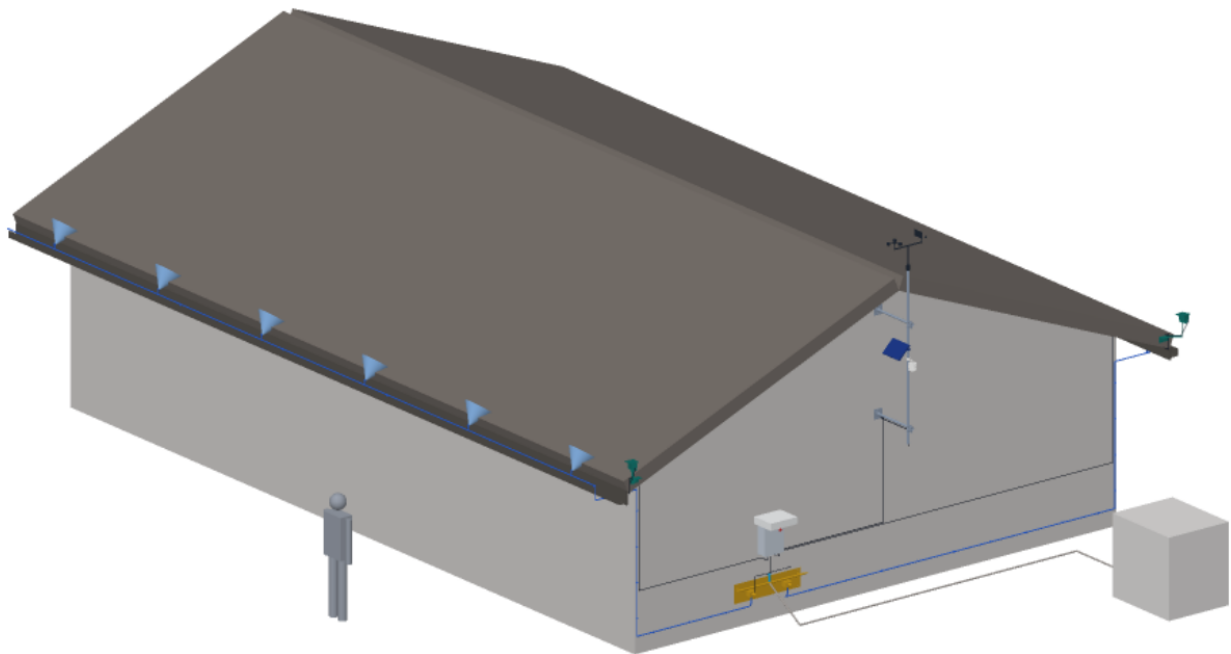

Grey figure: 1.75 m person for scale. Grey house, tank and pump are context, not part of the kit.

Figure 1. EmberGuard on the 12 x 8 m reference house, with a 1.75 m person for scale. Weather mast at the east gable, a sensor pod at the east end of each gutter, ground unit and valves on the gable wall, spray lines on both gutters (front spray envelopes shown in blue). Grey house, tank and pump are context. Rendered from the parametric model.

■ How it works

1. **Watch.** Outside fire weather the controller samples wind, wind direction, air temperature and humidity once a minute and sleeps between samples.
2. **Arm.** It arms when sustained wind reaches 30 km/h (or gusts 50 km/h) with relative humidity at or below 20 % for 10 min, or when the owner arms it by key switch or phone. These defaults resemble common Red Flag conditions, which vary by region, and are adjustable. Once armed, it stays armed for at least 6 h and runs both pod sensors at 4 frames per second.
3. **Detect.** Each sensor's frames are compared with a slowly updated background. Two patterns count as embers: - a **persistent hot spot**: a cluster of 1 to 4 pixels at least 2 K above its background for 5 s or more (decided, EGD-DDR-002, O5; was 5 K), which is what a landed ember or smouldering debris looks like; - an **ember shower**: 10 or more short hot flickers per minute across the view, from embers in flight or bouncing on the roof. Sun-heated roofing warms slowly and over large areas, so it is rejected by the small-cluster and rate-of-rise tests.
4. **Wet.** On a detection, the valve on the side of the detection opens first so its line fills within 47 to 54 s at 4 L/min (EGD-CAL-001, C3). In calm air the zones then alternate every 30 s. When the wind vane and anemometer show more than 2 m/s of wind across the eaves, only the leeward zone runs, continuously at 4 L/min, because wind drift starves the leeward eave; a detection on the windward side returns the system to alternating zones (decided, EGD-DDR-002, O4; EGD-CAL-001, C10). Either way the supply sees a steady 4 L/min. Spraying continues until 30 min after the last detection. A pressure transducer confirms that water is flowing; a dry-contact relay can start a pump that runs on its own supply.
5. **Fail safe.** If sensor data stops while armed (for example a pod is damaged by heat), the controller assumes the worst and sprays in the same cycle until the battery or water runs out. Loss of controller power closes the normally closed valves, which saves the tank.
6. **Tell.** A siren and status light at the ground unit, and a phone alert when a network is available, report arming, spraying and faults. An event log records detections, wind and valve actions for later study.

EmberGuard: water per 4 h ember event, litres (all values are estimates; leeward zone only, 8.3 m/s cross-wind)

github.com/BoujeeEnjinia1781/emberguard

CONCEPT, NOT FOR FABRICATION

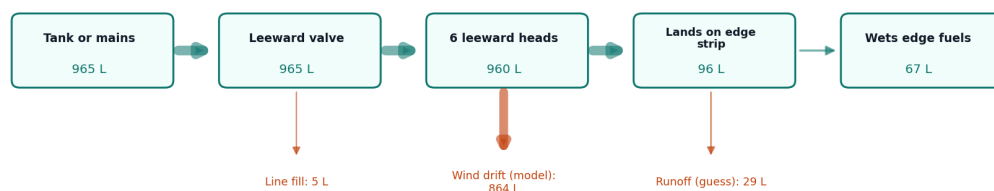


Figure 2. Water per 4 h ember event in the 30 km/h design wind. All values are estimates: the six leeward heads at 40 L/h running continuously under the leeward-only rule, wind drift from the screening model in EGD-CAL-001 v0.2 at an 8.3 m/s cross-wind (10 % on target on the leeward eave), and a guess at runoff from the gutter and roof edge. The figure shows why R6 is still not met.

■ Main components


Table 1. Main components. Numbers match `bom/bom.csv` and Figure 4. Items 16 and 17 are not shown in Figure 4.

#	Component	Proposed choice	Notes
1	Mast, standoffs and crossover plates	40 x 2 mm 6061-T6 aluminium tube, 2.45 m, held 700 mm off the gable wall by two DN25 galvanized pipe standoffs in slip-on flanges on aluminium wall plates, joined to the mast by crossover plates and U-bolts; cable inside the tube	Carries the weather sensors and solar panel; top 4.70 m above ground
2	Sensor pods (2) with hoods and brackets	Die-cast aluminium box about 100 x 80 x 70 mm with a stainless hood and a small pod node that digitizes the sensor; on a bent flat bar arm from a cleat screwed to the end of the roof overhang (decided, EGD-DDR-002, O3; mount EGD-DDR-003); sensor in a window in the pod wall under a short lens hood	Pod 200 mm beyond the gutter end, 500 mm above the lip, over the gutter centreline
3	Thermal array sensors (2)	MLX90640 BAB, 32 x 24 pixels, 55 x 35 degree field of view (decided, D2), one in each pod	Aimed along the gutter, 10 degrees toward the house and 5 degrees down
4	Anemometer and wind vane	Weather-station cup anemometer (pulse) and vane on a 460 mm crossarm	On the mast top, 5.0 m above ground, clear of the ridge
5	Temperature and humidity sensor	Digital sensor in a five-plate radiation shield	On the mast, clear of spray
6	Controller boards	Ground controller (ESP32 class) with valve drivers, linked over RS-485 to the two pod nodes	Firmware beyond a labelled sketch is TRL 4 work
7	Ground enclosure	Steel IP65 box about 160 x 320 x 400 mm on wall lugs on the gable wall, centre 1.15 m up, light-coloured; battery strapped on the floor, boards on the gear plate, cables in through bottom glands	Steel for heat and ember resistance; light finish, on the shadiest available wall, under the folded white shade (item 18) (decided 2026-10-02)
8	Battery	12.8 V 10 Ah LiFePO4 with built-in BMS (decided, EGD-DDR-002, O5)	About 128 Wh nominal, 115 Wh usable
9	Solar panel	10 W panel facing the equator at 45 degrees on a tilt bracket on the mast, with a LiFePO4 charge controller that stops charging above 45 °C (decided 2026-10-02)	Keeps the battery full between events; no credit taken during smoke
10	Zone valves A and B	Two 12 V DC normally closed solenoid valves, each on its own tee under a manifold on a valve board on the gable wall (decided, D9)	Front and back eave; closed on power loss; zero-minimum-pressure type
11	Pressure transducer	0 to 10 bar, 0.5 to 4.5 V	Confirms water flow; warns of a dry supply
12	Pump-start relay	Isolated dry contact	Signals the pump's own certified controls; no mains inside EmberGuard
13	Mast and pod cables	Shielded outdoor cables; heat sleeve at each pod	Mast: wind, humidity and solar; pods: power and RS-485
14	Eave spray lines and heads		

#	Component	Proposed choice	Notes
		16 mm UV-stable polyethylene line clipped to each gutter lip, six micro-sprinklers per eave, risers up the gable wall corner and under the gutter on clips; 17.5 m and 21.1 m per zone	Metal eave runs decided if the budget allows (D4); it does not, so they are a \$110 priced option
15	Siren, status light and key switch	12 V siren, LED beacon, keyed arm switch	Key switch also disarms
16	Hardware, fittings and valve board	Valve board, manifold, clips, glands, fuses, battery strap	Modelled except fuses and small fixings
17	Mast earthing kit	Earth rod, clamp, conductor and mast bond	Added at TRL 3 for lightning protection
18	Enclosure sun shade	Folded white 1 mm aluminium sheet, 360 x 440 mm with three 100 mm flaps, on two flat-bar arms bolted to the gable wall 1.48 m up; 70 mm above the siren	Added on 2026-10-02 (EGD-DEC-001); cuts the enclosure's sun load for R10 [F6]

EmberGuard: cutaway through the front eavegithub.com/BoujeeEnjinia1701/emberguard

CONCEPT, NOT FOR FABRICATION

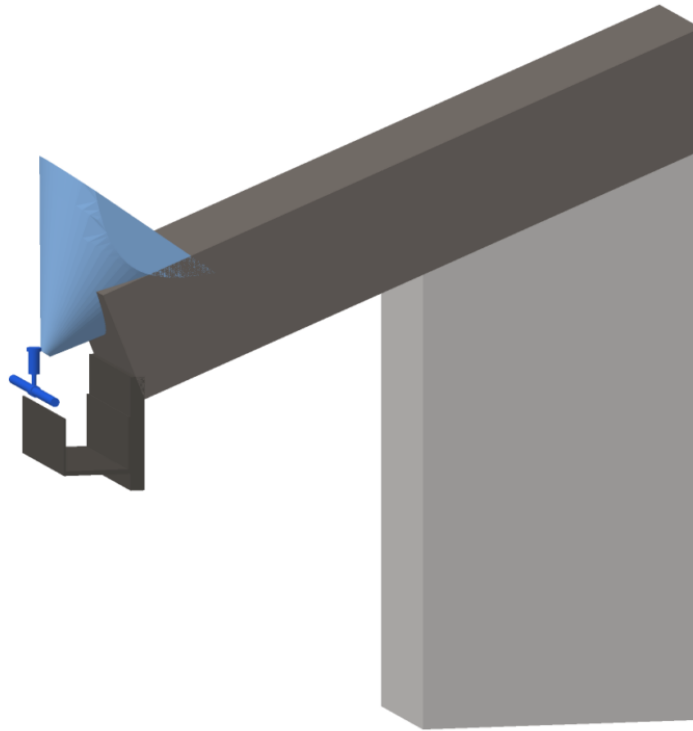


Section at the east spray head ($x = 5.5$ m), looking west: wall, roof overhang, fascia, gutter, spray line (14) and indicative spray envelope (blue).

Figure 3. Section through the front eave at the east spray head, looking west: wall, roof overhang, fascia, gutter, spray line and head (14) on the gutter lip, and the indicative spray envelope over the gutter and roof edge.

EmberGuard: exploded viewgithub.com/BoujeeEnjinia1701/emberguard

CONCEPT, NOT FOR FABRICATION

- 1 Mast, wall plates, flanges, standoffs and crossover plates
- 2 Sensor pods (2) with hoods and brackets
- 3 Thermal array sensors (2)
- 4 Anemometer and wind vane
- 5 Temperature and humidity sensor
- 6 Controller board
- 7 Ground enclosure, steel
- 8 Battery, 12.8 V 10 Ah LiFePO4
- 9 Solar panel, 10 W
- 10 Zone valves A and B on the valve board
- 11 Pressure transducer
- 12 Pump-start relay (dry contact)
- 13 Mast, pod and valve cables
- 14 Eave spray lines and heads (2 zones)
- 15 Siren, status light and key switch
- 18 Enclosure sun shade, folded white sheet

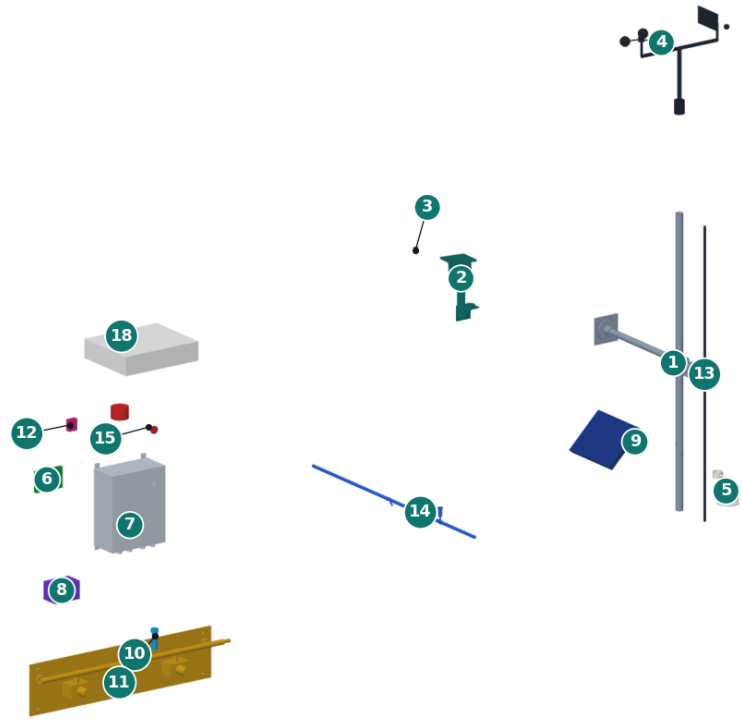

Numbers match bom/bom.csv. Front pod, ground unit and a spray-line sample drawn beside the mast, not in installed positions. Items 16 and 17 not shown.

Figure 4. Exploded view with BOM numbers. The front sensor pod, the ground unit and a 1.4 m sample of spray line are drawn beside the mast, not in their installed positions.

■ Numbers checked at TRL 3

All values come from EGD-CAL-001 v0.6 (docs/04-calcs/sizing.py); the tags in brackets are its output lines. They are paper estimates.

Table 2. Key numbers.

Quantity	Value	Basis	Requirement
Pixel footprint	0.24 x 0.20 m at 8 m, 0.42 x 0.36 m at 14 m	1.72 x 1.46 degree pixels [A1]	
Pod position	200 mm beyond the gutter end, 500 mm above the lip (2.97 m above ground)	Model [A2]	
Gutter interior in view	1.25 m to 12.95 m from the gutter end, both gutters (open gutter); range 1.5 to 13.1 m	Line of sight on the model [A3], [A5]	R3 met
Hanger straps every 750 mm	Debris 42 mm below the lip seen at 35 of 118 stations, none beyond 7.8 m; debris within 10 mm of the lip seen at 95 of 118	[A4]	R1 at risk
Grazing angle on the debris	7.4 degrees at 4 m, 3.8 degrees at 8 m, 2.4 degrees at 13 m	[A6]	
Former ridge-line head	Debris seen at 0 of 130 stations	[A7]	
100 cm ² spot at 300 °C	Flat on the debris: 6.7 K at 8 m, 1.6 K at 13 m; reaches the 2 K trigger to 12.1 m. Debris face 100 x 50 mm: 43 K at 8 m, seen to 41 m	2 K trigger [B9] to [B11]	R1 at risk
10 mm ember, 600 °C	Reaches 2 K to 8.8 m centred in a pixel, 4.4 m on a pixel corner (5.5 m and 2.8 m at the former 5 K)	[B6], [B7]	R2 at risk
Flow and application	4 L/min per zone; 15.4 mm/h while running	[C1]	
Line fill	Water at the farthest head 47 s (A) and 54 s (B) after detection	Detection-side zone first [C3]	R5 met
Supply pressure	About 2.3 bar at the manifold	Friction and 2.1 m lift [C4]	
Water per event	965 L (255 US gal)	4 h at 4 L/min plus line fill [C5]	R7 met, 3.5 % margin
Net wetting, leeward-only rule	Leeward eave 1.5 mm/h at 8.3 m/s (0.8 mm/h alternating) and 5.1 mm/h at 4.2 m/s; windward eave dry until a windward detection, then 7.4 mm/h	Droplet screening model [C7], [C10]	R6 not met
Energy	54.4 Wh for 72 h armed plus 13.1 Wh for 4 h spraying = 67.5 Wh	0.76 W armed, 3.24 W spraying [D2] to [D4]	
Battery	115.2 Wh usable at 25 °C, 103.7 Wh at 0 °C, 92.2 Wh at end of life	12.8 V 10 Ah LiFePO4 [D4]	R8 met
Pump on its own battery (studied)	About 57 W, 229 Wh per event; a 25 Ah LiFePO4 pack or one SwapCell pack (1.6 events)	[D7] to [D9]	Out of kit scope (D6)
Mast at 120 km/h	174 N; 31 N·m at the upper standoff; 14 MPa (factor 16.6)	[E2], [E3]	R10 wind met
Standoffs		[E4]	

Quantity	Value	Basis	Requirement
	153 N reaction; 50 MPa in DN25 pipe (factor 4.7); about 535 N per wall anchor		
Enclosure in sun at 60 °C	About 71 °C (mid-grey), 67 °C (light, sun on face and top), 63 °C (light, with the shade); charging stops above 45 °C	[F1], [F5], [F6]	R10 at risk
Pod arm at 120 km/h	About 8 MPa (factor 19); about 70 N pull per coach screw	[E5]	
Sun shade at 120 km/h	Up to 108 N of uplift; about 40 MPa in each arm (factor 4); about 320 N per wall screw	[E7]	
Studies on paper (design unchanged)	Coarser droplets give the leeward eave 4.6 mm/h at 8.3 m/s; a second leeward row would need 1,920 L per event; pods 1 m above the lip lose the first 1.2 m of each gutter and double the arm load	[C11] to [C14], [A8], [E6]	R6 still not met
Kit parts cost	\$707 against the \$605 value-engineering target	bom/bom.csv [G1]	R13 over the value-engineering target by USD 102

■ Key design choices

Amish decided the TRL 2 review items on 2026-09-25 by accepting each recommendation (EGD-DDR-001), and later the same day accepted the recommendations left open after TRL 3 (EGD-DDR-002). The choices below are therefore decided.

- **Thermal arrays, not simple flame sensors (decided, D2).** Near-infrared flame sensors respond to flames and sunlight and cannot say where a hot spot is. A 32 x 24 thermal array locates hot spots, measures their size and ignores sun-warmed roofing.
- **Watch the gutter from its end (decided, O3).** Landed embers and smouldering debris persist for seconds to minutes and are what actually ignites a house, and gutters are where they collect. A sensor above the ridge cannot see into a gutter behind the eave. A pod beyond the gutter end looks straight along it. Hanger straps still hide deep debris far from the pod.
- **Arm on weather, trigger on embers (decided, D7 and O5).** Adjustable defaults of 30 km/h sustained or 50 km/h gusts with humidity at or below 20 % for 10 min, plus manual and remote arming, reviewed with a local fire agency. Persistent-spot trigger 2 K, ten times the sensor noise at 4 Hz; its false-trigger rate needs recorded thermal video (TRL 4, on hold).
- **Weather mast at the gable end (decided, D3).** The mast now carries only the wind, humidity and solar parts, clear of the ridge.
- **Leeward zone in wind (decided, O4).** Two zones halve the peak flow so a small pump can keep up, and suit a 1,000 L tank (decided, D5). In wind only the leeward zone runs, because drift starves it; the windward eave then relies on its own detections.
- **Low-voltage kit, pump by dry contact (decided, D6).** No mains wiring on the house; the pump keeps its own certified controls and its own power, provided by the homeowner.
- **Fail to wet on sensor loss (decided, D8), fail closed on power loss (decided, D9).** Losing a pod during the fire is likely; losing the controller should not drain the tank.

- **Battery with margin (decided, O5).** A 10 Ah pack covers 72 h armed and 4 h of spraying with 37 % to spare at end of life.
- **Polyethylene eave runs (D4).** Metal eave runs were chosen if the budget allowed; it does not, so they are a priced option.

■ Safety

Safety: EmberGuard is not a substitute for evacuation orders, home hardening or professional fire protection. Leave when told to leave. Never stay behind to operate, watch or repair the system during a fire.

Safety: Installing the mast, sensor pods and spray lines means working at height near a roof edge. Use a stable ladder, a second person and fall protection where required; do not work on a wet or mossy roof.

Safety: Water, pumps and electricity. The kit is 12 V DC only. Any mains-powered pump must keep its own certified controls and ground-fault protection; the EmberGuard relay only signals it through an isolated dry contact. Do not wire EmberGuard into mains circuits.

Safety: The LiFePO₄ battery is safer than other lithium chemistries but can still overheat if shorted or damaged. Use a pack with a built-in BMS and low-temperature charge cut-off, fuse the battery output, and keep the battery inside the steel enclosure. In full sun at 60 °C ambient a mid-grey enclosure reaches about 71 °C (about 67 °C with a light finish and 63 °C under the white sun shade), above the LiFePO₄ limits of 60 °C for discharge and 45 °C for charge: give the enclosure a light finish and the sun shade, mount it on the shadiest available wall, and use a charge controller that stops charging above 45 °C.

Safety: A tall metal mast on the gable is exposed to lightning. Bond it to a proper earth electrode (BOM item 17) and follow local lightning-protection practice. The wall anchors carry about 535 N each at 120 km/h; check them for each wall. The sensor pods stand on arms beyond the gutter ends; screw their cleats into a sound timber verge board and check them after storms.

Safety: Automatic sprinklers on mains water can reduce pressure for firefighters. Prefer a dedicated tank; if using mains, keep the flow at or below 4 L/min and follow local fire-agency guidance.

Safety: False reassurance is a hazard in itself. Gutter hanger straps hide deep debris far from the pods, the leeward eave gets little water in strong wind, the system can miss embers outside its view (vents, decks, the far gable), and it can fail in fire conditions. Keep gutters clean, fit gutter guards where deep debris collects (listed in the installation notes), and harden the house as if EmberGuard were not there.

■ Open questions

Decisions still to be made are indexed in the design decisions register (docs/06-design-decisions.md , EGD-DEC-001).

- [x] How should deep gutter debris beyond the hanger-strap shadow be watched? Decided 2026-10-02 (EGD-DDR-002, N3): pods raised to about 1 m above the gutter lip were studied on paper (EGD-CAL-001, [A8], [E6]). They see over the straps better (59 of 106 stations against 35 of 118) but lose the first 1.2 m of each gutter and double the arm's wind load, so the pods stay 500 mm above the lip. Gutter guards are in the installation notes of the build plan.

- [] How can the leeward eave get 5 mm/h in the design wind? Studied on paper (EGD-CAL-001, [C11] to [C14]), with R6 kept at the 30 km/h design wind: coarser droplets give 4.6 mm/h at 8.3 m/s, just short; lower angles put the water on the fascia and roof edge only; a second leeward row would need 1,920 L per event. Adopting a coarser-spray head is for Amish and a spray trial. Does real recirculation behind the ridge help?
- [] Can a 2 K persistent-spot threshold reject sun glints, hot vents, chimneys, birds and vehicles? This needs recorded thermal video, at TRL 4 or later (on hold).
- [] How long do ember showers last at a single house, and is a 4 h spraying design case reasonable?
- [] How hot do the pods get under radiant heat and ember attack at the gutters, and for how long do they keep working?
- [x] Budget for the \$605 kit: set to \$605 by Amish on 2026-09-26 (N1).
- [x] Should a third sensor cover vents, decks and the far gable? Left to a later version (decided 2026-10-02).
- [x] Should EmberGuard log and share anonymised ember arrival data with WUI researchers? Opt-in only, with the first partner agreeing what is shared and with whom (decided 2026-10-02).