



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

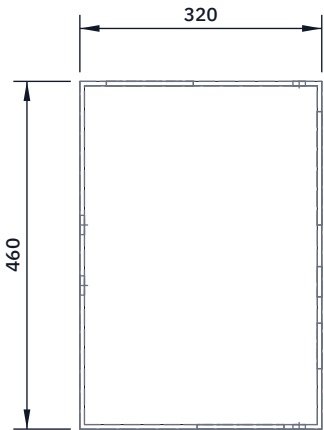


TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)

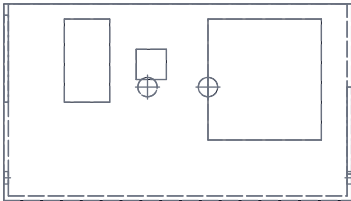

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

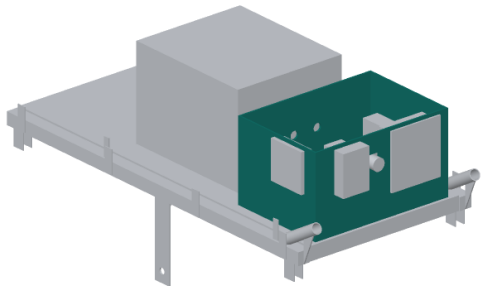

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Sizes are from the box's outside bottom edge and its centre line.

Outlet end (toward the handle): DC panel 150 x 160 mm, 40 to 190 mm right of centre, 80 to 240 mm up; AC outlet 60 x 110 mm, 90 to 150 mm left, 130 to 240 mm up; isolator 40 x 40 mm, 15 to 55 mm left, 160 to 200 mm up. (Right and left as seen facing that end.)

Right side wall: fan 115 x 115 mm, 35 to 150 mm from the battery end, 35 to 150 mm up. Left wall: exhaust 115 x 115 mm, 155 to 270 mm from the battery end, 130 to 245 mm up.

Battery end: two 25.5 mm gland holes, 40 mm each side, 150 mm up.

Both side walls: a 16.5 mm PV gland hole 30 mm from the outlet end, 30 mm up. Floor: four 6.5 mm holes for the deck bolts.

Cut with a step drill and a fine jigsaw; tape first; no solvents.

FIELDCELL

github.com/BoujeeEnjinia1701/fieldcell

FieldCell electronics box: cutting sketch

DRAWING NO.

FCL - DWG - 110

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Bought IP54 polycarbonate box 320 x 460 x 300 mm