



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

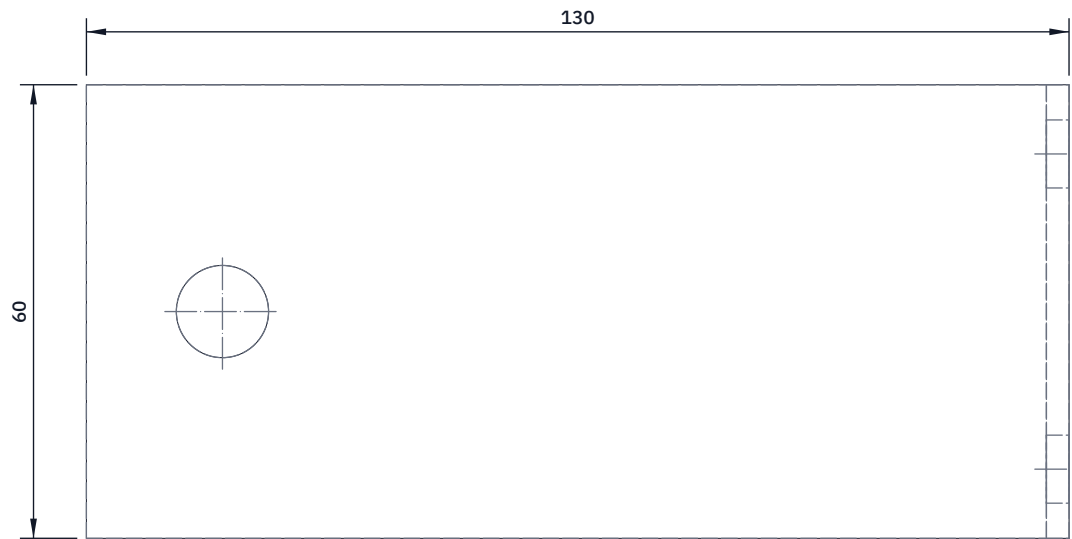


TOP VIEW

Scale 1:1; looking down (along -Z)

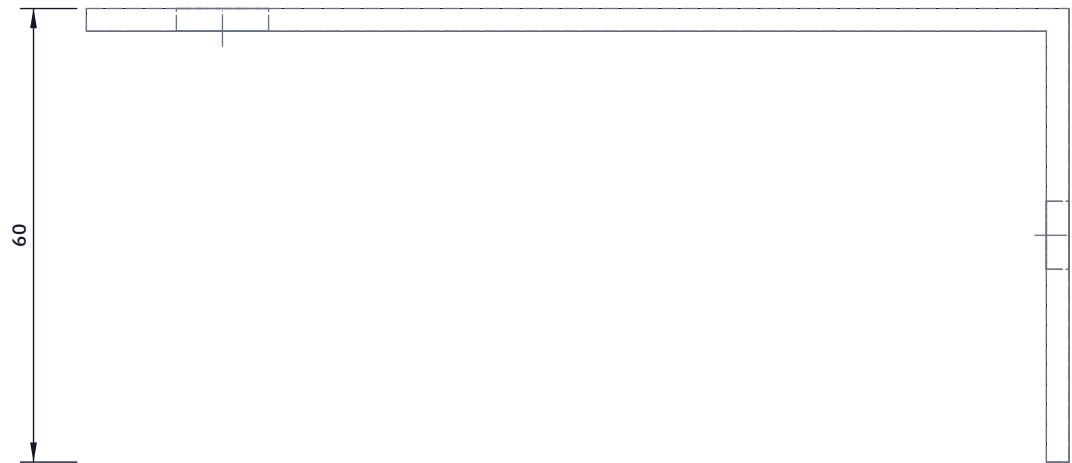


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

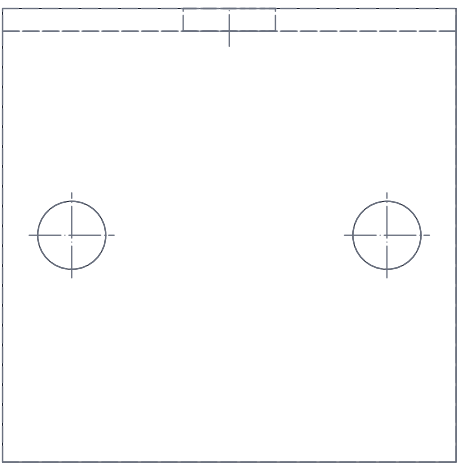

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

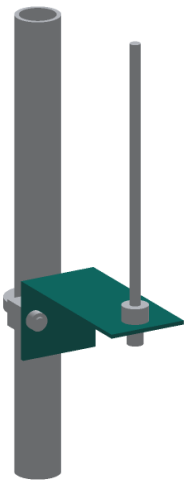

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 60 wide x 190 long from 3 mm 5052 aluminium.
Bend 90 degrees 60 mm from one end: the short side is the upright leg against the mast, the long side (130 mm) sticks out level.
Upright leg: two 9 mm holes 42 mm apart, 30 mm below the bend.
Level leg: one 12.2 mm hole on the centre line, 112 mm from the outside face of the upright leg, for the antenna's bulkhead.
Fit: on the bin side of the mast, 2.08 m up, on a V-saddle and a U-bolt. The antenna's bulkhead goes through the level leg with its connector underneath; the whip stands up, 140 mm from the mast.
Check: the whip stands upright and clear of the panel frame.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard antenna bracket: making sketch

DRAWING NO. GGD-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand