



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

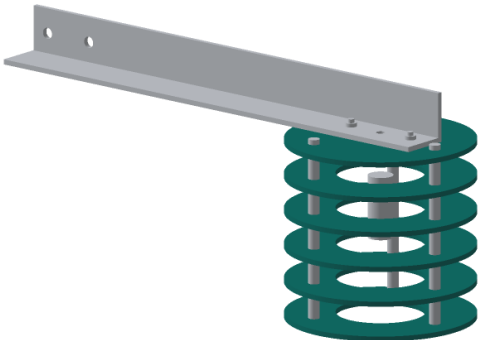

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print six plates 150 mm across and 4 mm thick in white ASA.

All six: three 5.2 mm holes on a 110 mm circle, 120 degrees apart.

Top plate (one): solid, with a 7 mm hole in the centre for the sensor lead and two M5 heat-set inserts 30 mm each side of the centre, in line with the arm.

Ring plates (five): a 70 mm hole in the middle so air can pass.

Stack on three M5 stainless rods with 24 mm nylon spacers between the plates (28 mm pitch); nuts above the top and below the bottom.

The sensor hangs on its lead inside the stack, 25 mm below the top.

Fit: two M5 screws through the arm's flat leg into the inserts.

Check: the plates are parallel and the sensor does not touch them.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard radiation shield plates (print 6): making sketch

DRAWING NO. GGD-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES White ASA, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand