REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

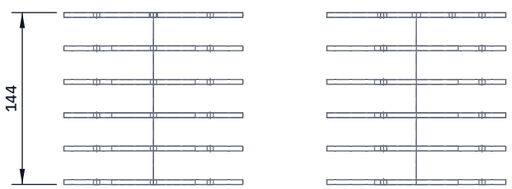

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

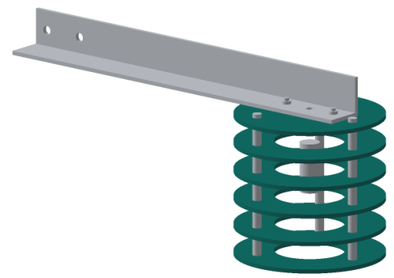

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print six plates 150 mm across and 4 mm thick in white ASA.
All six: three 5.2 mm holes on a 110 mm circle, 120 degrees apart.
Top plate (one): solid, with a 7 mm hole in the centre for the sensor lead and two M5 heat-set inserts 30 mm each side of the centre, in line with the arm.
Ring plates (five): a 70 mm hole in the middle so air can pass.
Stack on three M5 stainless rods with 24 mm nylon spacers between the plates (28 mm pitch); nuts above the top and below the bottom.
The sensor hangs on its lead inside the stack, 25 mm below the top.
Fit: two M5 screws through the arm's flat leg into the inserts.
Check: the plates are parallel and the sensor does not touch them.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard radiation shield plates (print 6): making sketch

DRAWING NO.	REV	SHEET	SIZE
GGD-DWG-111	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

White ASA, 3D printed, 100 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand