



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

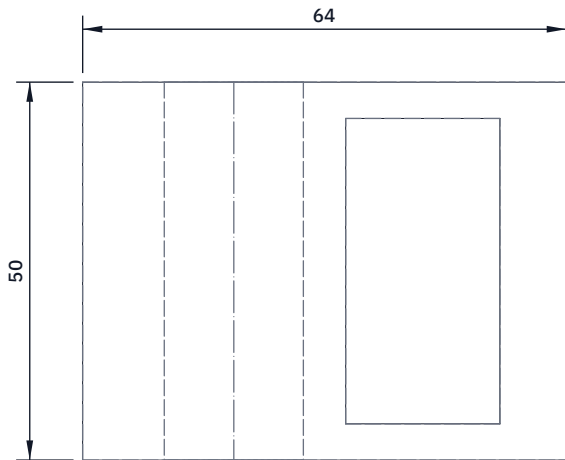


TOP VIEW

Scale 1:1; looking down (along -Z)

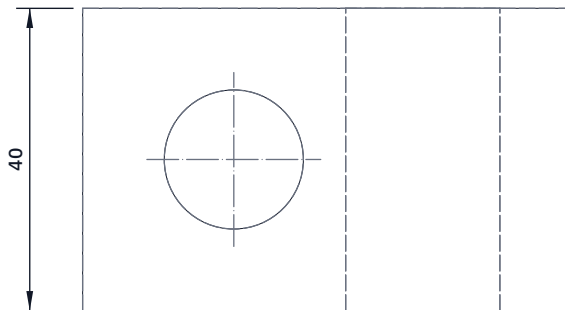


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

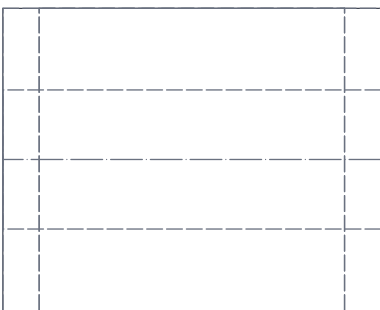

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

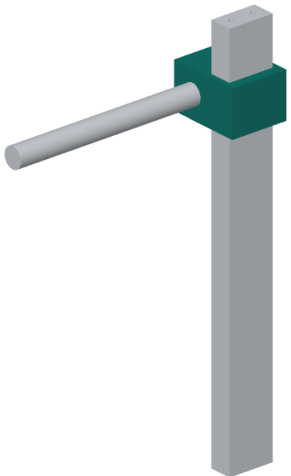

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print in PETG at 100 % infill: 64 wide, 50 deep, 40 tall.
Slot 20.4 x 40.4 mm top to bottom for the post (0.2 mm clear each side), its centre 13 mm right of the block's centre.
Bore 18.4 mm front to back for the arm, 25 mm left of the post centre and half way up, so the arm passes beside the post.
Print a hex pocket for an M6 nut and a 6.6 mm hole into the slot and into the bore, each locked by an M6 thumb screw.
Fit: slides on the post; the arm slides through the bore.
Check: slides freely when loose and does not move when locked.

GRIDBENCH

github.com/BoujeeEnjinia1701/gridbench

GridBench arm clamp (on the post): making sketch

DRAWING NO. GBN-DWG-115			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	