



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

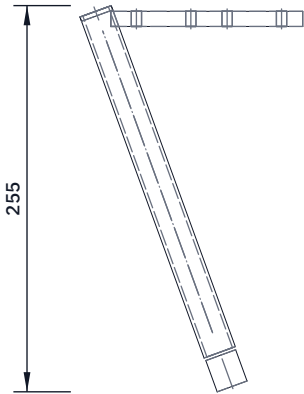

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

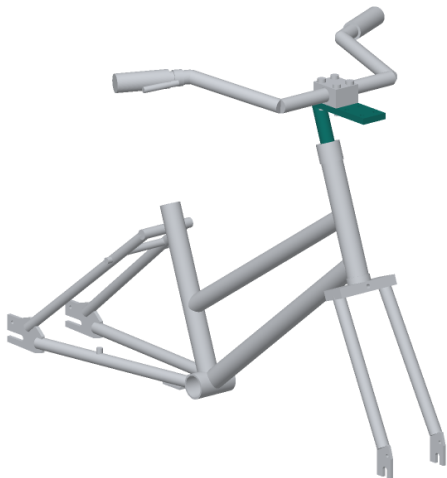

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Quill: cut 240 from 22.0 x 2.0 chromoly tube. Weld a 3 mm steel cap in the top with an 8.5 hole; fit the bought expander wedge at the bottom with the M8 x 260 expander bolt (13 mm head on the cap).

Head plate: 127 x 44 x 10, 4130. Cope one end to the quill's 22 curve. Drill 6.8 and tap M8, eight holes: at 27, 63, 87 and 123 ahead of the quill's center line, 13 each side of the plate's center line.

Weld the plate square across the quill's front, its top flush with the quill top and level when the quill leans back 20 deg (use a 70 deg jig block). TIG both sides.

Scribe the minimum insertion mark 100 up from the quill's bottom.

Check: the quill slides in the 22.2 bore of the steerer; the plate clears the headset locknut by 2 mm at the lowest setting.

GROWRIDER

github.com/BoujeeEnjinia1701/growrider

GrowRider quill stem with head plate: making sketch

DRAWING NO. GRR-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Chromoly 4130 tube 22.0 x 2.0 mm; 4130 plate 10 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	