
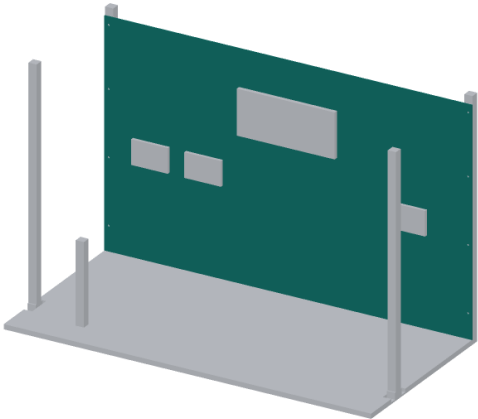
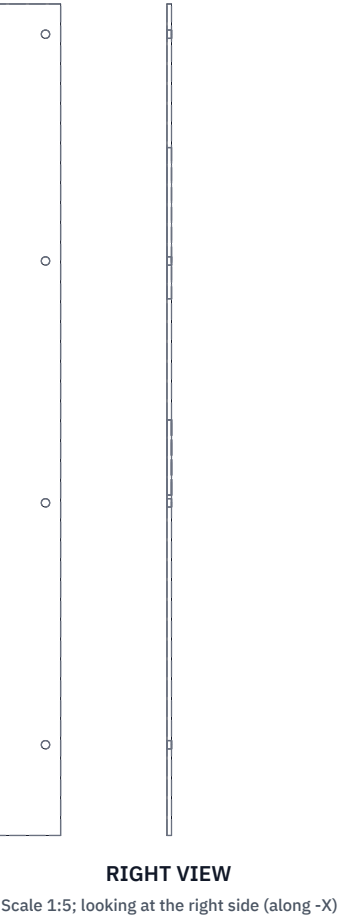
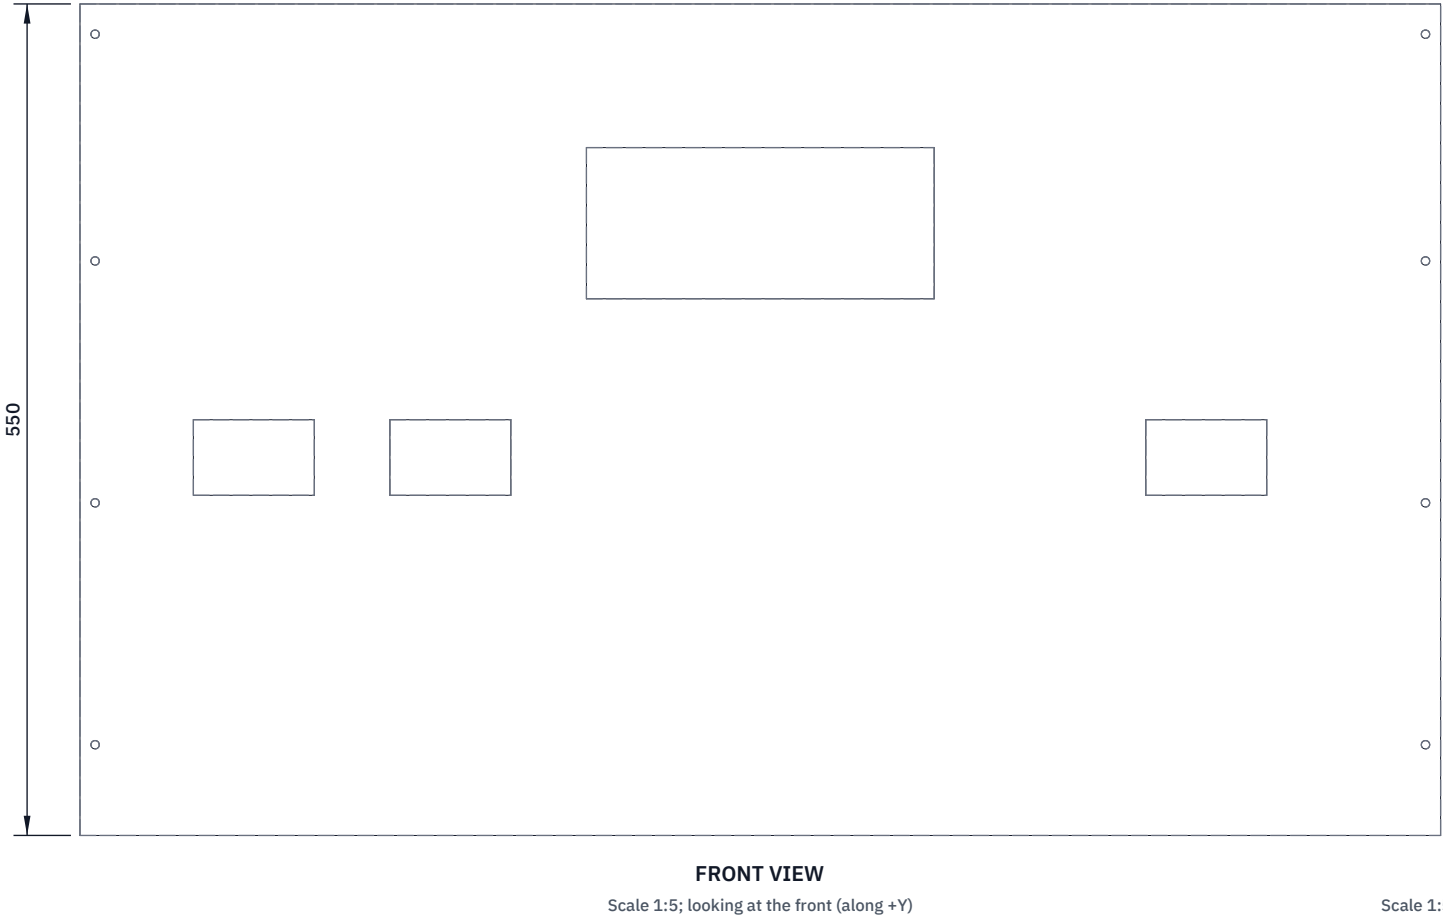


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

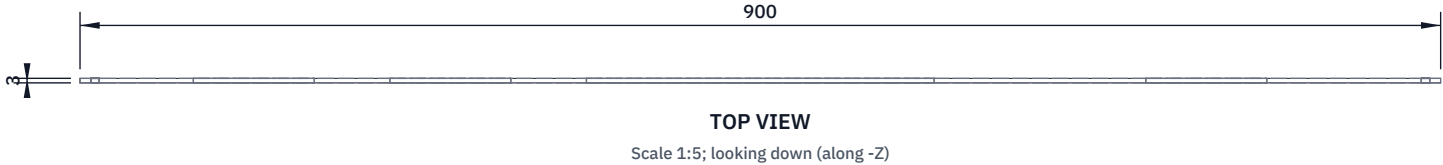

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut the panel to 900 wide x 550 tall.

Have the energy-chain schematic printed on the front before drilling, or apply it as a printed vinyl.

Four 5.5 mm holes 10 mm in from each side edge, at 60, 220, 380 and 530 mm up from the bottom edge, for M5 button heads into T-nuts in the rear posts.

Display cut-out 230 x 100 mm, centred, 355 to 455 mm up.

Three stage meter cut-outs 80 x 50 mm, 225 to 275 mm up, with left edges 75, 205 and 705 mm from the left side (the meter bezels are 10 mm larger and cover the cut edges).

Fit: the back face sits flat on the rear posts; the bottom edge rests on the deck with a silicone bead (the panel is the back of the drip tray); the top edge meets the side rails.

Check: the panel is flat and square to the deck.

H2BENCH				github.com/BoujeeEnjinia1701/h2bench			
H2Bench instrument back panel: making sketch							
DRAWING NO. HBN-DWG-105			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium composite panel 3 mm, printed face							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	