



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Clear-lid box; four glands in the bottom	2026-10-02	AC

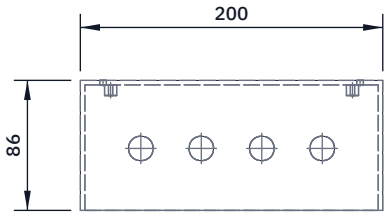

TOP VIEW

Scale 1:5; looking down (along -Z)

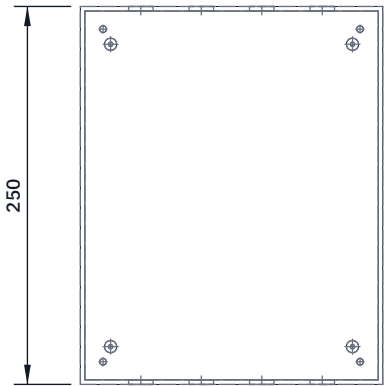


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

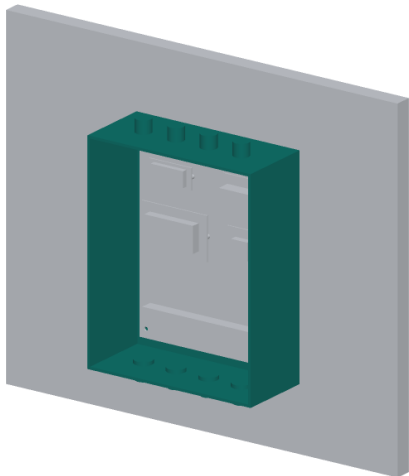

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Top face: four 16.2 mm gland holes, 45 mm in from the back face, 20 and 60 mm each side of the centre (40 mm apart).

Bottom face: four 16.2 mm holes 45 mm in from the back, 20 and 60 mm each side of the centre: oxygen sensor, pressure switch, dry-contact output and supply lead, from left to right.

Back: use the box's own corner fixing holes, outside the seal (about 170 x 220 mm apart here; follow the box you buy).

Inside the back: four moulded bosses, 160 x 200 mm apart, carry the mounting plate; check them on your box before drilling the plate.

Tape, pilot 3 mm, step drill slowly, deburr. No solvents.

Fit an M16 gland in each hole, nut inside, seal outside.

Check: each gland seal sits flat; nothing cracks round a hole.

H2GUARD

github.com/BoujeeEnjinia1701/h2guard

H2Guard controller box: drilling sketch

DRAWING NO. HGD-DWG-104		REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Bought IP65 polycarbonate wall box 200 x 250 x 90 mm, clear lid				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	