




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

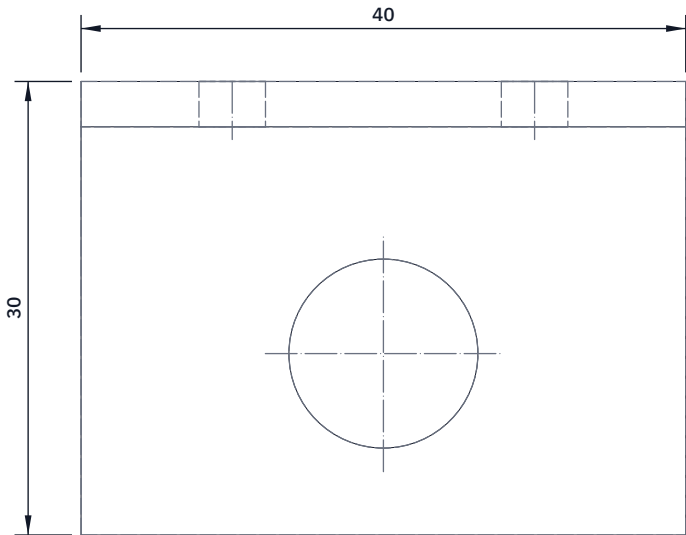


TOP VIEW
Scale 2:1; looking down (along -Z)

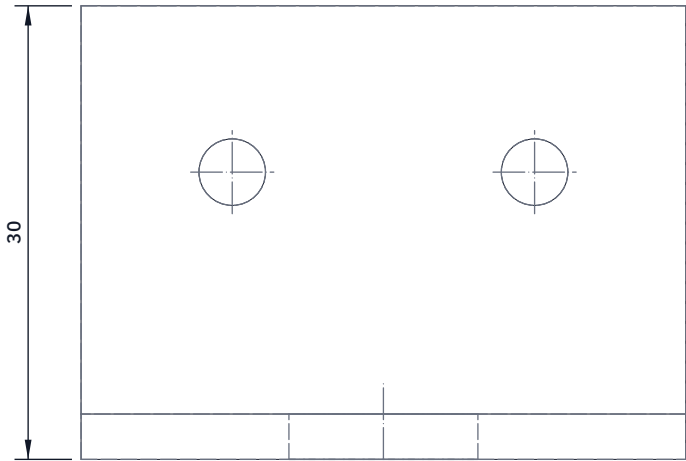

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

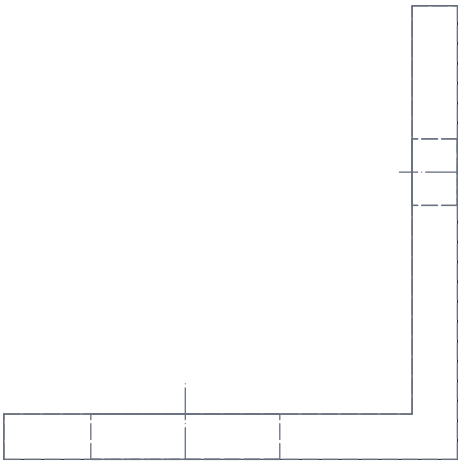

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

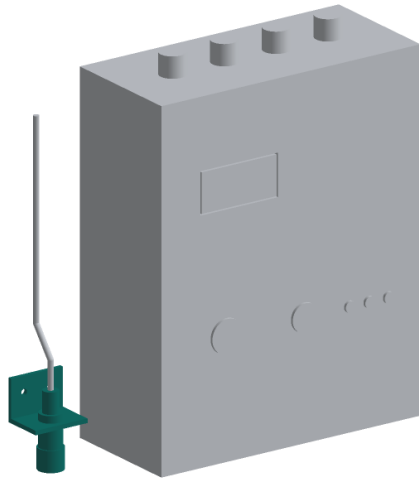

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 40 mm of 30 x 30 x 3 mm angle; square and deburr the ends.

Upright leg (goes on the wall): two 4.4 mm holes 10 mm each side of centre, 19 mm up from the underside of the flat leg.

Flat leg (stands out from the wall): one 12.5 mm hole at mid-length, 18 mm out from the wall face, for the bulkhead test port.

Fit the port from below, nut on top, dust cap pointing down.

Fit: two M4 screws with wall plugs, 35 mm left of the controller, flat leg 1,250 mm above the floor.

The 4 mm tube pushes into the top of the port and runs up the wall.

Check: the port is square to the leg and the cap comes off by hand.

H2GUARD

github.com/BoujeeEnjinia1701/h2guard

H2Guard bump test port bracket: making sketch

DRAWING NO. HGD-DWG-107		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium equal angle 30 x 30 x 3 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	