BUILD PLAN SKETCH, PLAN NOT YET BUILT

HeatMap Node · github.com/BoujeeEnjinia1701/heatmap-node

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

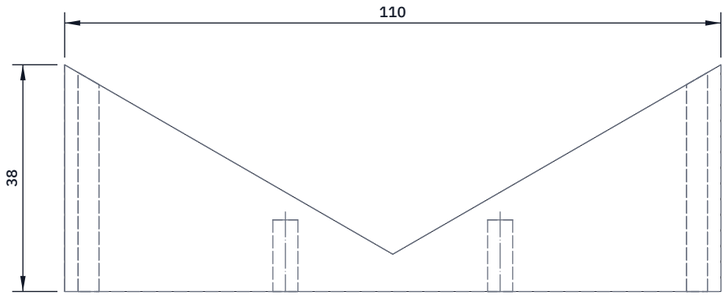

TOP VIEW

Scale 1:1; looking down (along -Z)

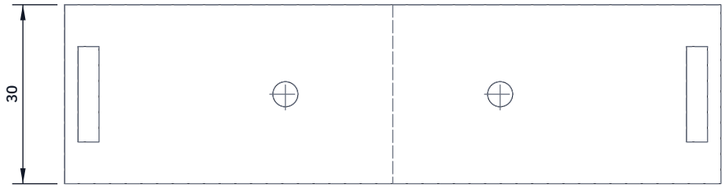

FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

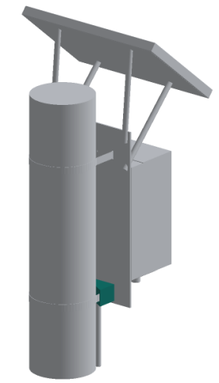

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print two, standing on the 110 x 38 mm face, 100 % infill, 5 walls.
Block 110 wide, 30 tall and 38 deep with a 120 degree V across its whole width: point 31.8 in from the pole face, 6.2 from the back.
Two band slots 3.5 x 16 mm right through, front to back, 51 each side of centre, centred on the height; they line up with the slots in the FieldNode back plate.
Two holes for M4 brass heat-set inserts in the flat back face, 18 each side of centre, centred on the height, 8 deep; press the inserts in with a soldering iron, flush.
Fit: the flat back sits on the back of the FieldNode back plate in place of FieldNode's own V-blocks, held by its M4 countersunk screws.
Check: poles of 60, 114 and 200 mm each touch both V faces.

HEATMAP NODE

github.com/BoujeeEnjinia1701/heatmap-node

HeatMap Node pole adapter V-block (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
HMN-DWG-107	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

ASA, 3D printed at 100 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand