



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

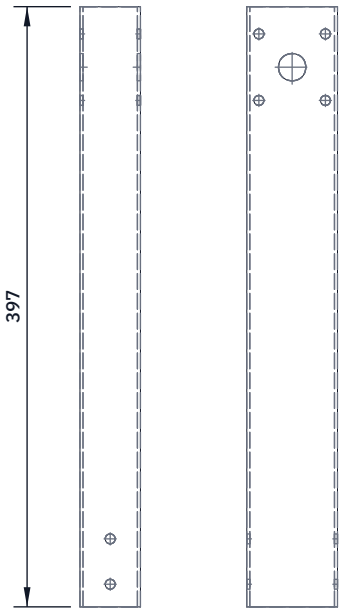


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

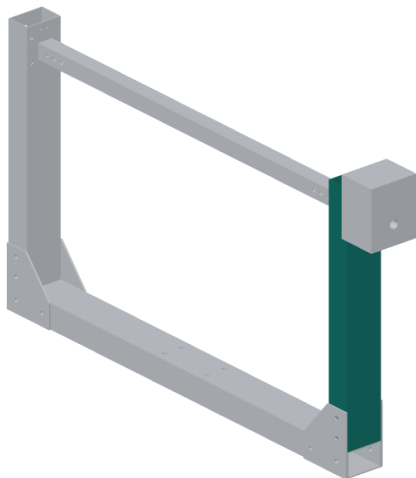

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 397 mm of 60 x 40 x 2 mm tube; square and deburr. The 60 mm faces are the sides; the 40 mm faces are the front and back.

Bush hole: 18 mm through both sides, centred, 40 mm below the top end. Drill 6 mm pilot, open with a step drill, ream.

Gearbox holes (right arm): four 6.5 mm through both sides on a 44 mm square round the bush hole (22 mm each way). Check the gearbox's output-face holes before drilling.

Gusset bolt holes: 6.5 mm through the front and back faces, centred, 15 mm and 45 mm above the bottom end.

Fit: stands on the crossbar end; two gussets clamp it; the bearing plug fills its top 75 mm; the gearbox bolts to the outer side.

Check: the bush hole is square to the side (a 14 mm rod through it stands at 90 degrees to the arm).

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite right arm (drive side): making sketch

DRAWING NO. HLT-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminum rectangular tube 60 x 40 x 2 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	