


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

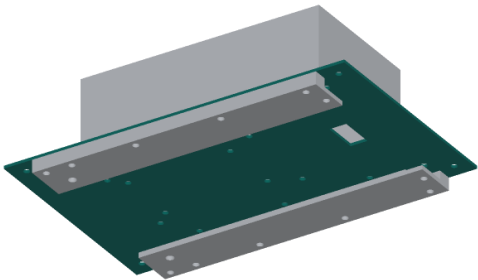

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 240 x 150 mm from 2 mm 5052 sheet. Origin at the centre;

X is positive toward the front, Y to the left; top face is the datum.

Frame holes 4.5 mm at 110 mm each side of centre, 65 mm each side (4).


Rail holes 4.5 mm on lines 70 mm each side: at -93, -75, -30, 30, 90 mm along X on both lines; stop holes 4.5 mm at 95 mm, 55 mm each side.

Clinch nut holes 4.22 mm (14): lid flange at -60, 0, 60 mm, 50 each side; 25 mm standoffs at -75 and 25 mm, 30 each side; 8 mm standoffs at -66 and 6 mm, 21 each side.

Cable slot 12 x 24 mm from 70 to 82 mm along X, on the centre line: drill 6 mm in the corners, cut between, file square.

Press M3 clinch nuts in from the UNDERSIDE with a vice and two flat plates; they must sit flush underneath (the shoe slides there).

Check: run a straight edge across the underside; nothing proud.

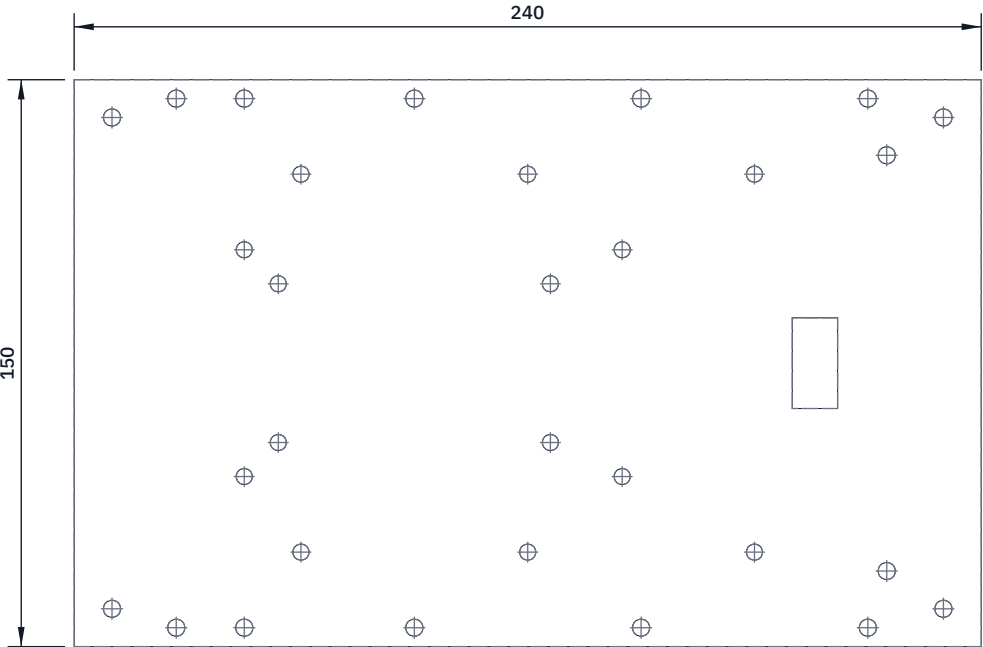

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core plate: making sketch

DRAWING NO. KWC-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 2 mm, 5052-H32					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand