


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

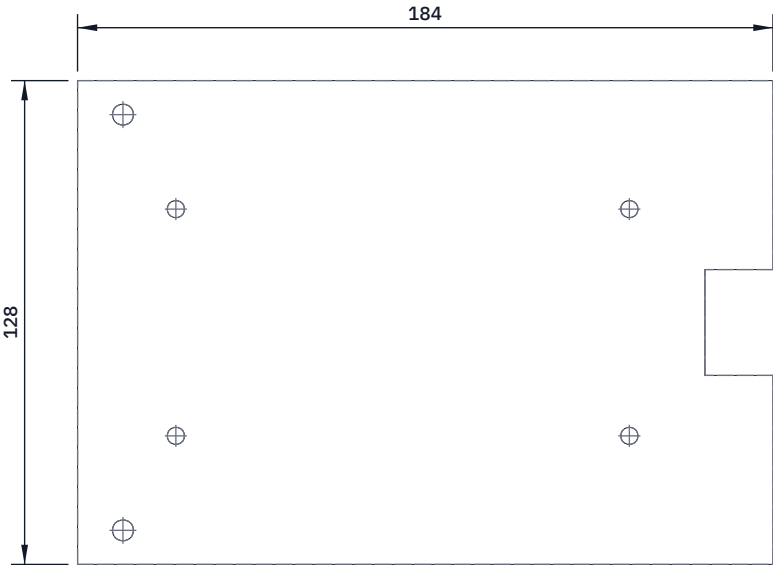

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

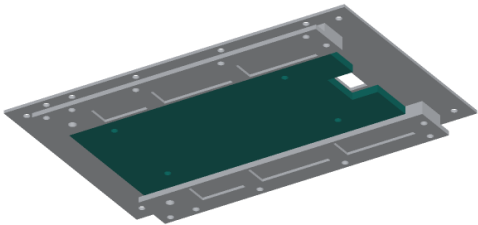

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One per payload. Blank 184 x 128 mm from 5 mm plate; ends and long edges square and straight (they run in the rail).

Cable notch in the front edge: 18 mm deep, 28 mm wide, centred.

Pin holes 5.5 mm: 12 mm from the rear edge, 9 mm in from each long edge (55 mm each side of the centre line).

Payload holes: four 4.5 mm, countersunk on the TOP face for M4, at 26 and 146 mm from the rear edge, 30 mm each side of centre.

Chamfer the rear corners 2 mm so the shoe finds the rail.

Check: slides the full rail length without binding; both pins drop into their holes at the front stops.

KITEWRIGHT CORE			github.com/BoujeeEnjinia1701/kitewright-core		
Kitewright Core payload shoe: making sketch					
DRAWING NO. KWC-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium plate 5 mm, 6061-T6					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					