




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Lightened under Amish's decision 33B (KWC-DDR-003)	2026-10-03	AC

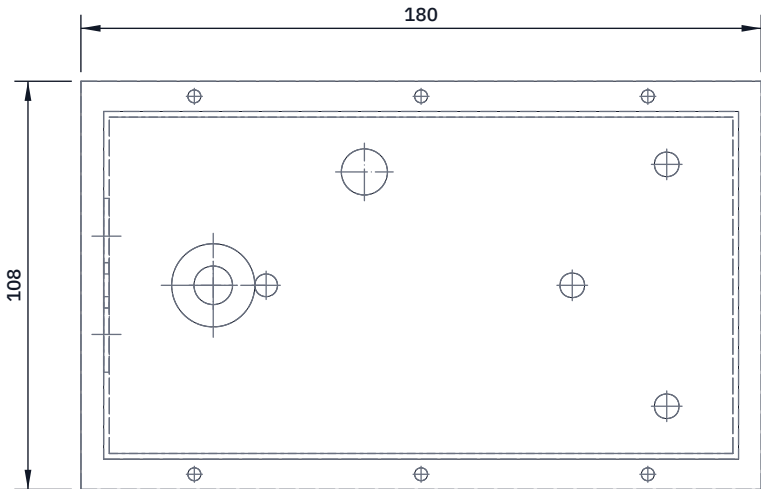


TOP VIEW
Scale 1:2; looking down (along -Z)

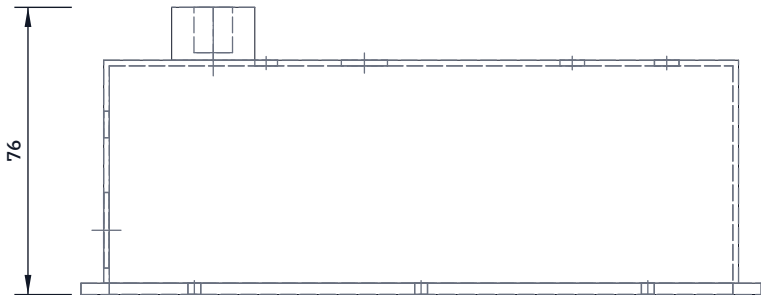

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

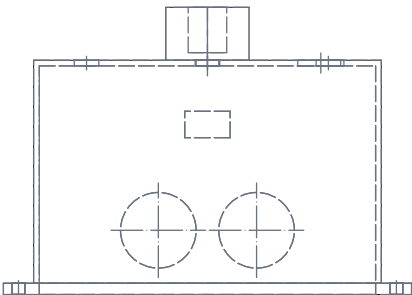

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

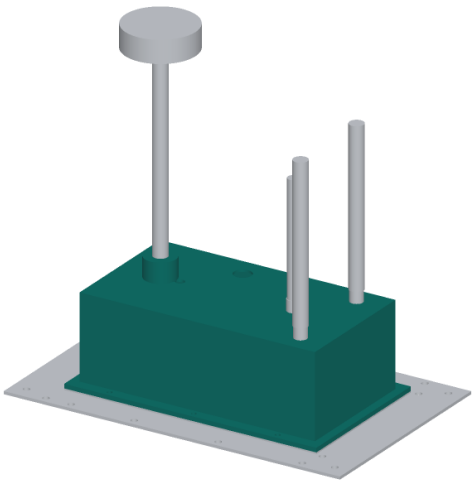

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print open side down on the flange; no supports except the two rear grommet holes and the service opening (bridges).

Outside 168 x 92 x 62 mm, 1.5 mm walls and top; flange 180 x 108 x 3 mm with six 3.4 mm holes, 50 mm each side, at -60, 0, 60 mm.

Top: mast boss 22 mm across, 14 mm tall, 10.2 mm socket 12 mm deep, at 55 mm behind centre; heat-set M3 insert in its side for the thumbscrew; 6 mm GNSS cable hole beside it.

Top: three 6.5 mm SMA holes and a 12.2 mm safety switch hole.

Rear wall: two 20 mm grommet holes, 13 mm each side, 17 mm up; 12 x 7 mm service opening for the USB-C lead.

Fit: over the six M3 studs; nylon-insert nuts on the flange.

Check: lid sits flat on the plate on its gasket with no rock.

KITEWRIGHT CORE				github.com/BoujeeEnjinia1701/kitewright-core			
Kitewright Core lid: making sketch							
DRAWING NO. KWC-DWG-107			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES 3D printed ASA, light grey, 0.2 mm layers, 3 walls, 25 % infill							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			