


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWL-DDR-004: holes over the Core lid	2026-10-04	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

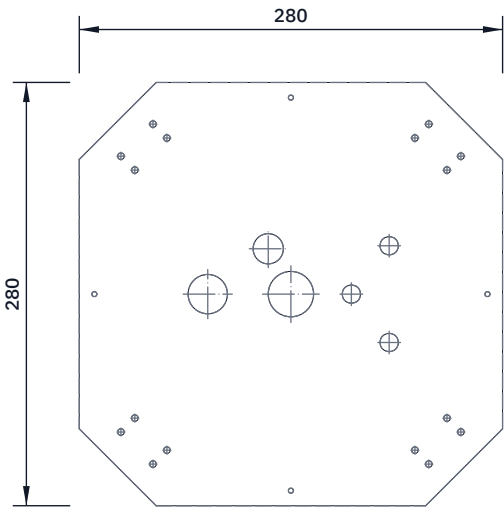


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

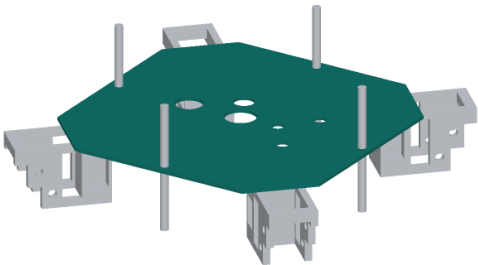

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Square 280 x 280; cut each corner square to the arm: 72 long face
- Corner faces lie 162 from the centre, measured along the diagonal
- Per corner four 4.3 holes for the hinge block: on the diagonal, 131 and 144 out, 15 either side
- Four 3.3 holes for the spacers, 130 from the centre on the X and Y axes
- 30 hole at the centre for the pack leads and mast cable
- Over the Core lid: 26 hole at X -55 (mast boss), 12 holes at X 65 Y 32 either side and X 40 (SMA), 20 hole at X -15 Y 30 (switch)
- Route with a diamond or carbide cutter; wear a dust mask; seal the edges with thin epoxy
- Check: lies flat on the bottom plate with every hole in line

Top hub plate: making sketch

DRAWING NO. KWL - DWG - 101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm carbon fibre sheet (woven, 0/90)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	