



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	M12 pin numbers added to the notes (decision of 2026-10-02)	2026-10-02	AC

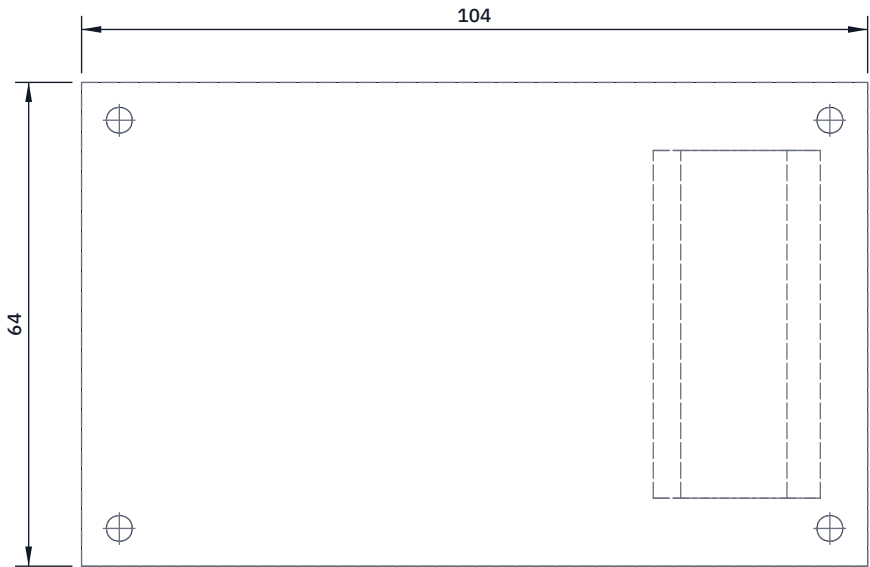


TOP VIEW

Scale 1:1; looking down (along -Z)

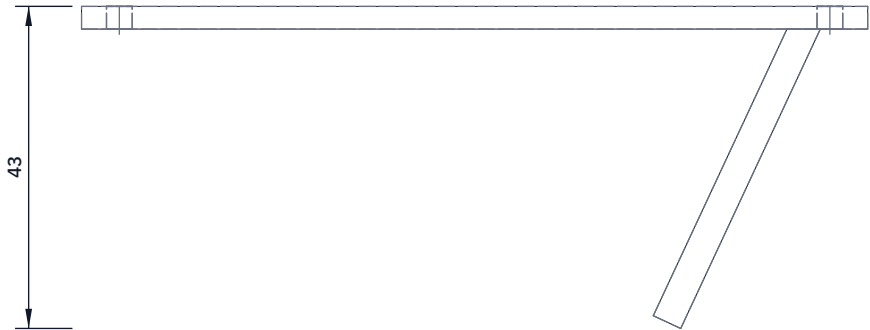


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

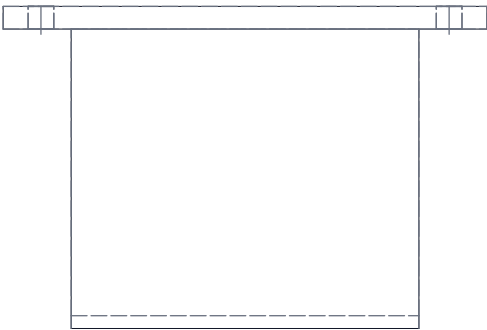

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

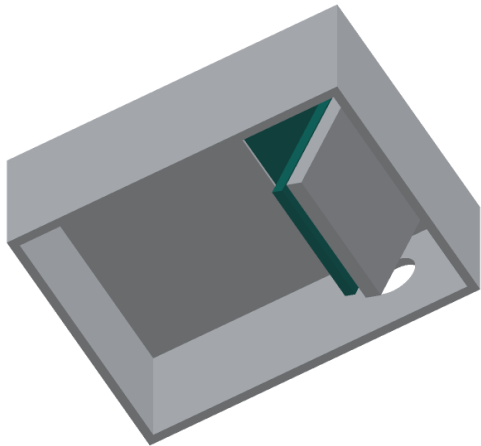

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One print: a plate 104 x 64 x 3 mm and a cradle 4 mm thick, 46 mm wide, 44 mm long, hanging below the street end at 25 degrees from upright.

Print with the plate flat on the bed and the cradle overhanging.

Four 3.4 mm holes 94 mm apart along and 54 mm apart across, to match the four bosses in the box (measure your box first).

Cradle: two 2.7 mm holes to match the radar module's mounting holes.

The module sits 3 mm off the cradle on nylon spacers.

Head board: four M3 standoffs 6 mm long on the underside, at the board's corner holes, 4 mm in from each edge.

Head board port outputs follow the M12 pinout: pin 1 12 V, pin 3 ground, pins 2 and 4 RS-485, pin 5 wake; the lead plugs are marked 1 to 5.

Fit: four M3 screws into the bosses from below.

Check: the radar face then tips 25 degrees down toward the street.

LAMPNODE

github.com/BoujeeEnjinia1701/lampnode

LampNode head internal plate: making sketch

DRAWING NO.

LPN-DWG-107

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:1

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

ASA, 3D printed, 100 % infill