




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

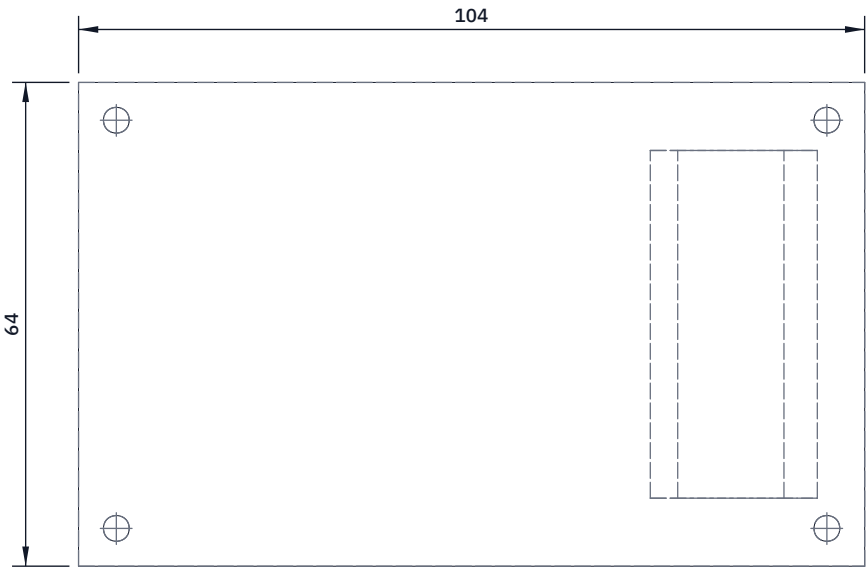


TOP VIEW
Scale 1:1; looking down (along -Z)

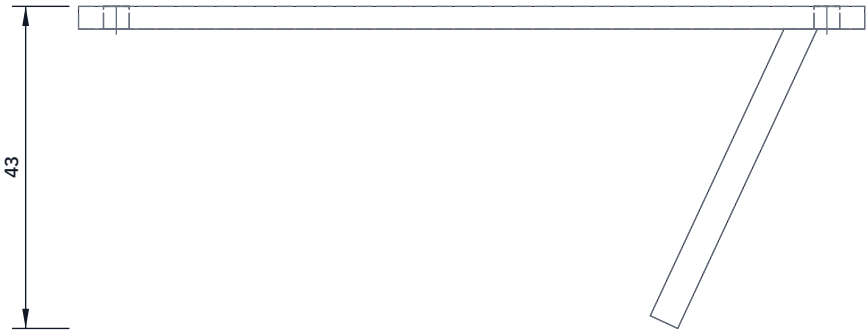

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

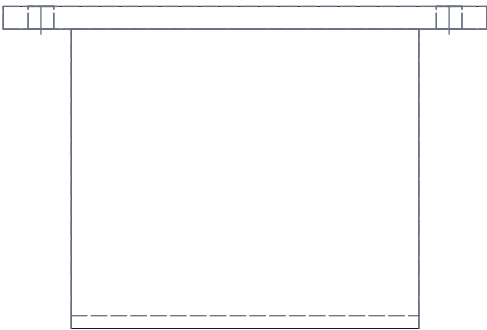

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

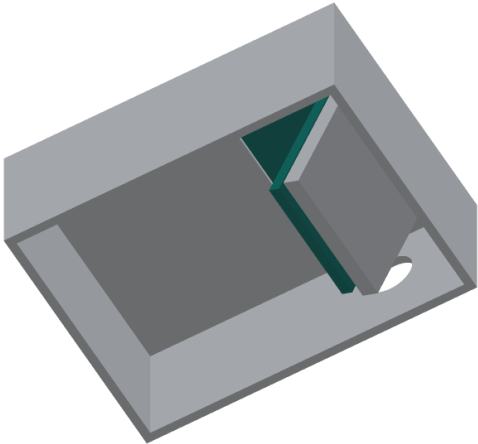

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One print: a plate 104 x 64 x 3 mm and a cradle 4 mm thick, 46 mm wide, 44 mm long, hanging below the street end at 25 degrees from upright.

Print with the plate flat on the bed and the cradle overhanging.

Four 3.4 mm holes 94 mm apart along and 54 mm apart across, to match the four bosses in the box (measure your box first).

Cradle: two 2.7 mm holes to match the radar module's mounting holes.

The module sits 3 mm off the cradle on nylon spacers.

Head board: four M3 standoffs 6 mm long on the underside, at the board's corner holes, 4 mm in from each edge.

Fit: four M3 screws into the bosses from below.

Check: the radar face then tips 25 degrees down toward the street.

LAMPNODE				github.com/BoujeeEnjinia1701/lampnode			
LampNode head internal plate: making sketch							
DRAWING NO. LPN-DWG-107			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha	
MATERIAL / NOTES ASA, 3D printed, 100 % infill							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							