



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

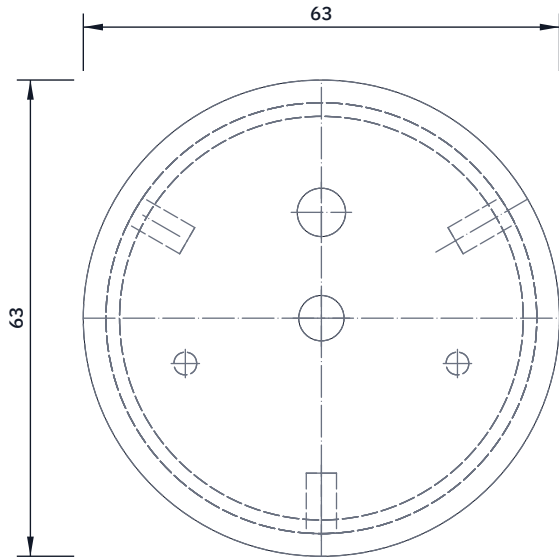


TOP VIEW

Scale 1:1; looking down (along -Z)

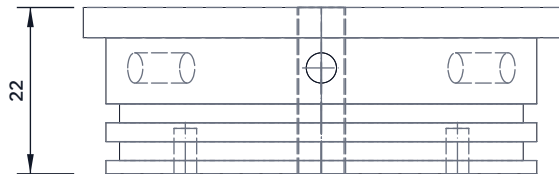

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

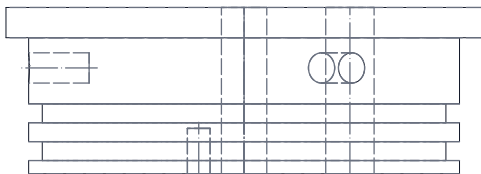

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn from 65 mm acetal bar: flange 63 mm diameter, 4 mm thick;
spigot 57 mm diameter (a light push fit in the tube), 18 mm long.
Two O-ring grooves in the spigot, 2.5 mm wide, 1.8 mm deep, centred
10 and 15 mm below the flange, for 2.5 mm section O-rings.
Eye bolt hole 6.5 mm on the axis, right through.
SMA bulkhead hole 6.5 mm, 14 mm from the axis, right through;
check the size against the bulkhead's datasheet.
Inner face: two M3 tapped holes 6 mm deep for the standoffs,
18 mm each side of the axis, 6 mm toward the side away from the SMA.
Radial holes: drill 3.3 mm, tap M4, through the tube's holes,
4 mm below the flange, 120 degrees apart (one away from the SMA).
Check: the plug pushes in by hand with O-rings greased.

LEAKLISTEN

github.com/BoujeeEnjinia1701/leaklisten

LeakListen top end plug: making sketch

DRAWING NO. LKL-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Acetal (POM) round bar, 65 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand