



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

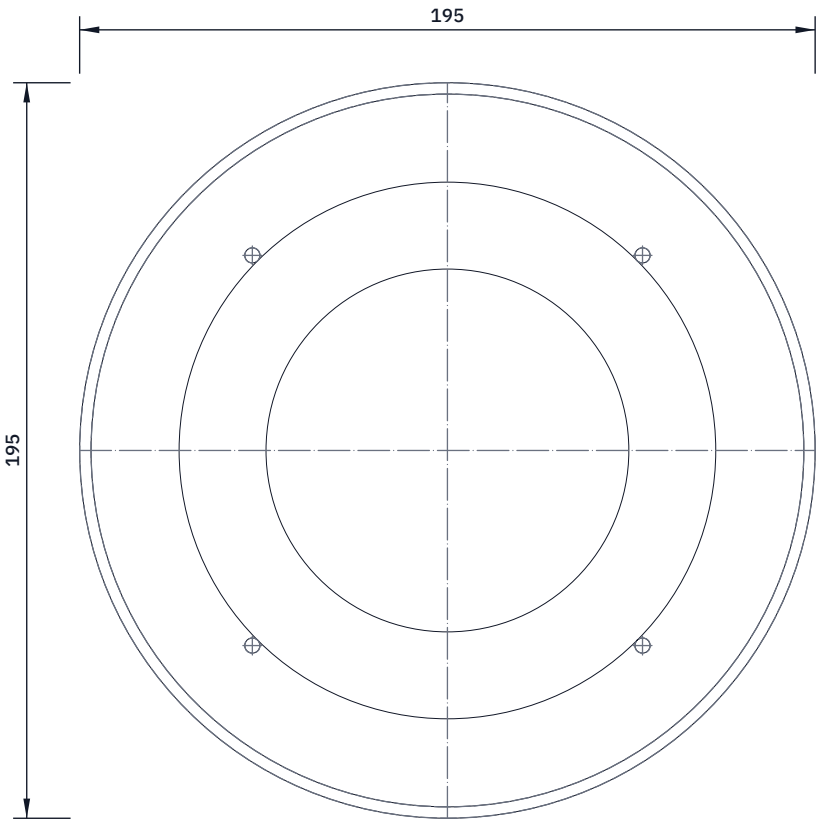


TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

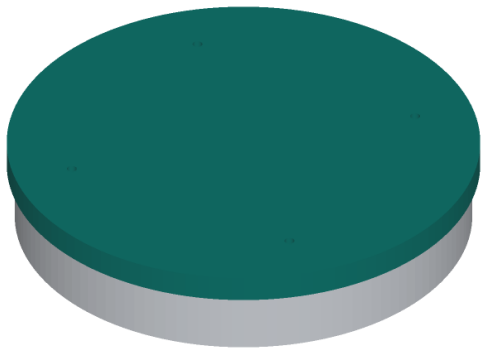

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn as printed: flange on the bed, core pointing up.
Flange 194.6 mm across, 5 mm thick, with a skirt 6 mm deep and 3 mm thick round its edge (188.6 mm inside): the skirt slides over the silicone block and centres the core in the cavity.
Core: a cone 142 mm across at the flange, 96 mm across at the tip, 18 mm long. It forms the inside of the dome.
Four 4 mm overflow holes on a 146 mm circle, at 45 degrees to each other: spare resin and air come out here.
Sand the core smooth and spray mould release before each cast.
Fit: flange flat on the top of the silicone block; the gap between the core and the cavity is the 4 mm dome wall at the crown.
Check: on a trial fit with no resin the flange sits flat all round.

LOADZONE

github.com/BoujeeEnjinia1701/loadzone

LoadZone dome core plug: making sketch

DRAWING NO. LDZ-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 0.2 mm layers					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	