


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

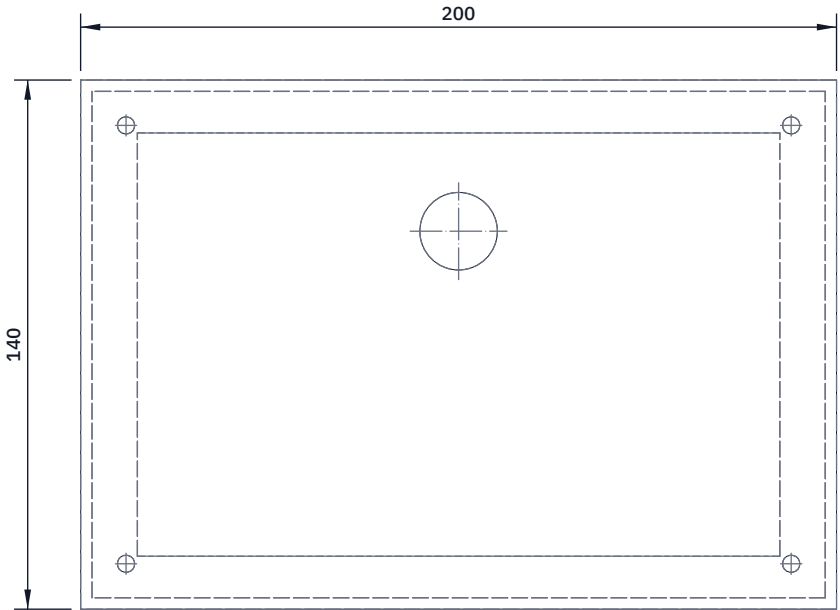

FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn laid flat, back wall up (the side you drill). Bought, clear lid, about 200 x 140 x 24 mm, IP65.

In the back wall, measured from its centre:

four 4.5 mm holes, 88 mm each side and 58 mm above and below;

one 20.5 mm hole for the M20 gland, 30 mm above centre.

Drill slowly from the outside with wood behind; deburr.

Inside: the e-paper panel tapes to the inside of the clear lid;

the driver board sits on the back wall on its standoffs.

Fit: back wall flat on the front of the sign face; four M4 pan-head screws from behind the sign, sealing washer and nut inside the housing; the gland body passes through the sign

face and its nut tightens from behind.

Check: the lid gasket closes with no wire across it.

LOADZONE

github.com/BoujeeEnjinia1701/loadzone

LoadZone display housing (option): drilling sketch

DRAWING NO. LDZ-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bought polycarbonate enclosure, clear lid, about 200 x 140 x 24 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand