
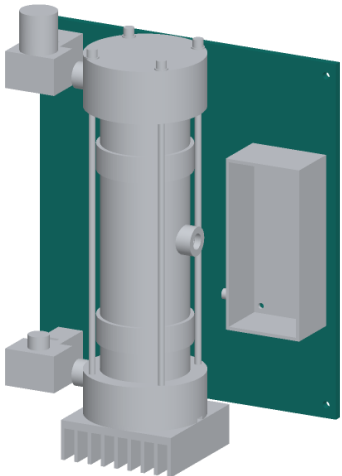
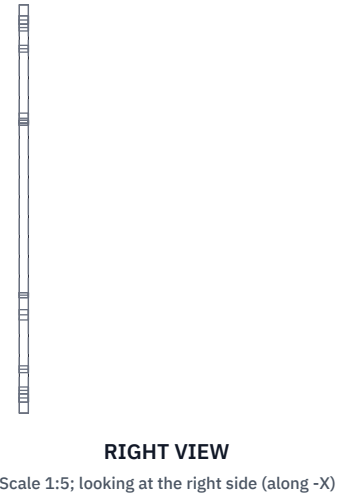
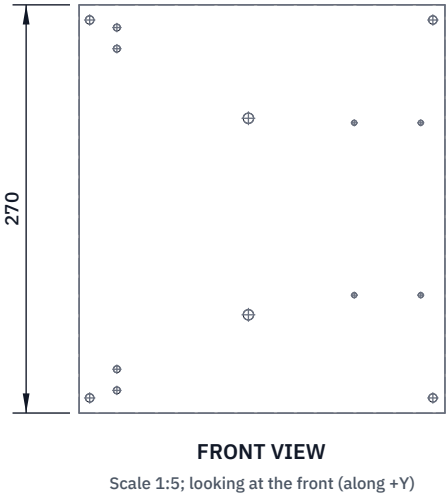


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

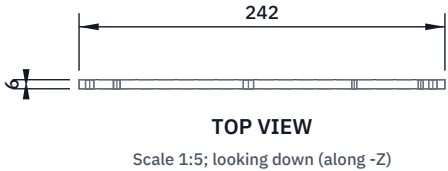

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut the blank 242 wide x 270 tall from 6 mm plate; square, deburr, round the corners to about 3 mm. Front view is the reactor side. Measure across from the left edge and up from the bottom edge.

Clamp studs: two M8 tapped holes (drill 6.8) 112 across, 65 and 195 up. The reactor axis is 112 from the left edge.

Enclosure: four M4 tapped holes (drill 3.3) 182 and 226 across, 78 and 192 up.

Saddles: four 4.5 mm holes 25 across, 15, 29, 241 and 255 up; countersink them on the back (wall) face.

Wall: four 5.5 mm holes 7 and 234 across, 10 and 260 up.

Deburr every hole on both faces.

Check: lay the saddles and the enclosure on it and look through each hole; the holes line up without forcing a screw.

LUMAFLOW				github.com/BoujeeEnjinia1701/lumaflow			
LumaFlow bracket plate: making sketch							
DRAWING NO. LMF-DWG-101			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium plate 6 mm, 6061 or 5083 class							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	