
BUILD PLAN SKETCH, PLAN NOT YET BUILT


LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

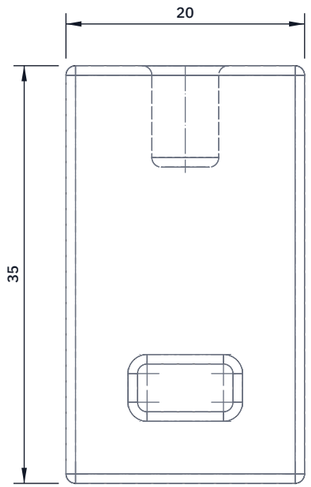


TOP VIEW

Scale 2:1; looking down (along -Z)



FRONT VIEW

Scale 2:1; looking at the front (along +Y)

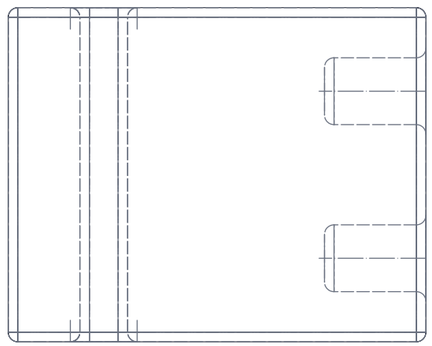

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print two blocks 20 wide x 35 deep x 28 tall, the 20 x 28 back face (the face that goes on the plate) flat on the bed.

Cable-tie slot: 8 wide x 4 deep, right through from top to bottom, 6 to 10 mm from the front face.

Back face: two M4 heat-set inserts on the centre line, 14 apart (7 above and below the middle), 8 deep.

Fit: two M4 x 10 countersunk screws from behind the plate.

The flat back of the flow sensor (lower saddle) or the valve (upper saddle) rests on the front face; one cable tie through the slot and round the body holds it.

The saddle only steadies the body; the stem adaptor carries the water connection.

Check: the front face is square to the back face.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow sensor and valve saddle (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
LMF-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
2:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

PETG, 3D printed, 4 walls, 40 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand