BUILD PLAN SKETCH, PLAN NOT YET BUILT

LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Window pocket to 13.5 for the PTFE washer	2026-10-02	AC

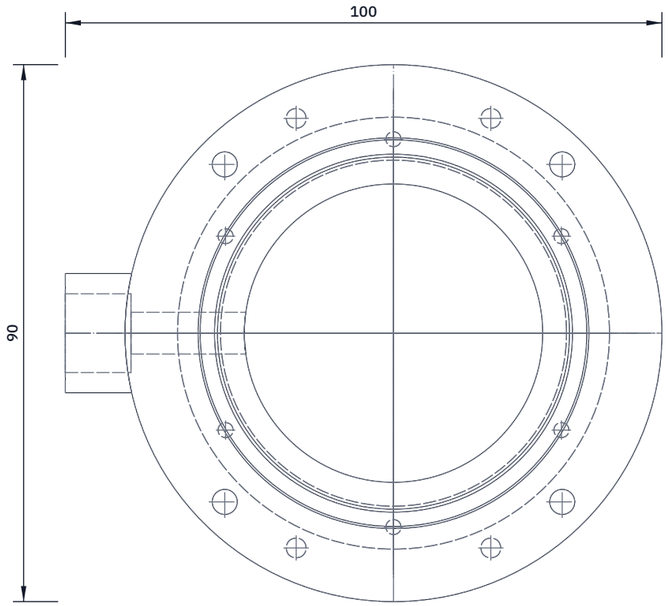

TOP VIEW

Scale 1:1; looking down (along -Z)

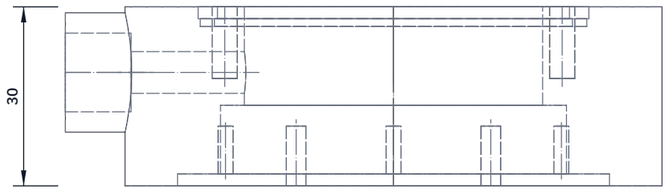

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

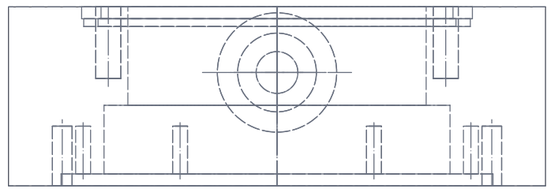

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

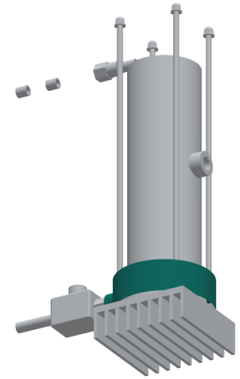

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn to 90 dia x 30. Bottom face (LED side) down in the views.
From the bottom: recess 72.4 dia x 2 deep for the retaining ring;
window pocket 58 dia up to 13.5 from the bottom; shoulder there;
50 mm bore from 13.5 up to the top face. Fine finish on the shoulder.
Top face: tube seat, a groove 59 to 65.5 dia, 2 deep, leaving a
59 dia spigot that the tube slides over; O-ring groove 60 to
64.8 dia, 1.3 deep, in the floor of the seat.
Inlet boss 20 dia on the left side, centre 19 up, face 55 from the
axis; tap 1/4 BSPP 11 deep, then drill 7 through to the bore.
Top face: four M5 tapped holes 12 deep on an 80 circle, at 45 deg.
Recess floor: six M3 tapped holes 8 deep on a 65 circle, at 30 deg.
Bottom face: four M4 tapped 10 deep at 16.3 and 36 from the axis.
Section picture: cap-sections.png in the build plan.
Check: the window drops into the pocket by hand.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow lower end cap: making sketch

DRAWING NO.	REV	SHEET	SIZE
LMF-DWG-103	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

316 stainless round bar 95 mm; machine shop (lathe and mill)

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand