REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 2:1; looking down (along -Z)



FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

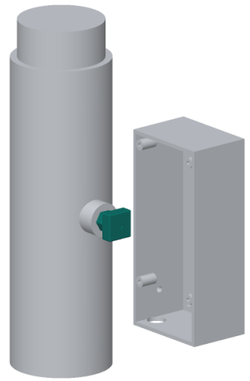

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn from 16 mm 316: an M12 x 1 nose 5 long, then a 14 dia body 8 long with two spanner flats 12 across.
Bore 5.4 through for the TO-46 photodiode can; counterbore from the outer end to suit the can's flange.
The nose's end face is flat and smooth: it presses the 10 x 3 quartz sensor window onto a 0.5 mm EPDM washer in the boss.
Fix the photodiode in the bore with UV-stable epoxy, window side facing the water. The amplifier (8 x 18 x 18) sits on the outer end; its lead runs to the enclosure gland.
Screw in by hand, then a quarter turn with a spanner.
Check: no light leaks round the nose when held to a lamp.

LUMAFLOW github.com/BoujeeEnjinia1701/lumaflow

LumaFlow photodiode holder: making sketch

DRAWING NO.	REV	SHEET	SIZE
LMF-DWG-110	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
2:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
316 stainless bar 16 mm; amplifier box bought

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com Generated from cad/src; do not edit by hand