BUILD PLAN SKETCH, PLAN NOT YET BUILT

LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	UV level bar, LED head socket, labels	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

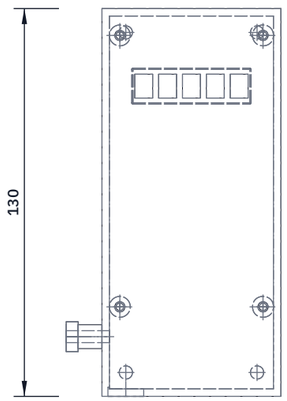

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

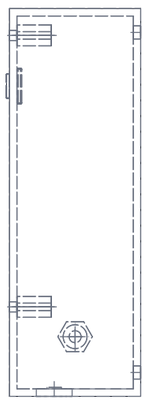

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

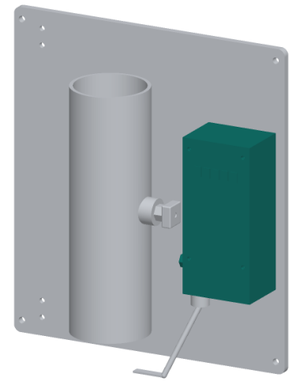

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body: a box 60 wide x 44 deep x 130 tall outside, walls 2.5, open at the front. Print it back face down.
Back face: four 4.4 mm holes, 8 in from each side and from the top and bottom, for M4 screws into the bracket plate.
Left side: 8 mm hole for the cable gland, 20 up from the bottom.
Floor: 12 mm hole for the LED head socket, 8 in from the left side and 15 behind the lid's front face.
Inside: bosses with M3 heat-set inserts for the modules, and a pocket for the lid reed switch near the front top corner.
Lid: 60 x 130 x 2.5. UV level bar: five windows 6 wide x 8 tall, 2 apart, centred across, 22 to 30 below the top; print the segments in clear PETG. Magnet; four M3 screws to the body.
Labels: UV-C warning label inside the lid, product label on the right side.
Check: the lid closes the reed switch; opening it opens it.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow electronics enclosure: making sketch

DRAWING NO.	REV	SHEET	SIZE
LMF-DWG-111	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

PETG, 3D printed, 4 walls, 30 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand