




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

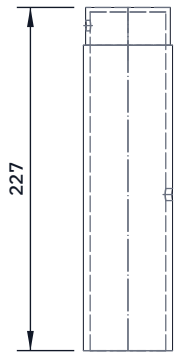

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

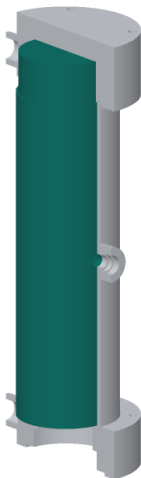

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut the PTFE tube 227 long. Turn the top 25 down to 56 dia.
Top disc: 56 dia x 3 from the same material, pressed into the top of the bore (bore depth 224) and flush with the end.
Outlet hole: 7 dia, 215 up from the bottom end, on the left.
Sensor hole: 8 dia, 103 up from the bottom end, on the right, exactly opposite the outlet hole.
Handle with clean gloves; never touch the bore. Any mark lowers the reflectance the dose depends on.
Fit: slides into the tube from the top with the sensor hole lined up with the boss; its bottom end sits on the lower cap's spigot, its turned top in the upper cap's pocket.
Check: look through the boss: the 8 mm hole is centred.

LUMAFLOW			github.com/BoujeeEnjinia1701/lumaflow		
LumaFlow PTFE liner and top disc: making sketch					
DRAWING NO. LMF-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES High-reflectance sintered or expanded PTFE tube 59 x 50					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		