



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

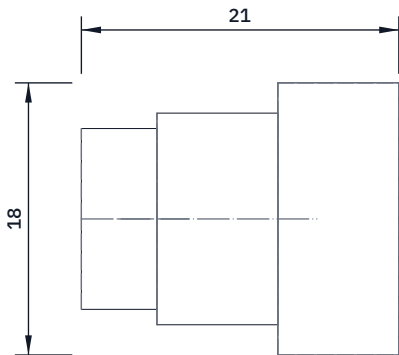


TOP VIEW

Scale 2:1; looking down (along -Z)

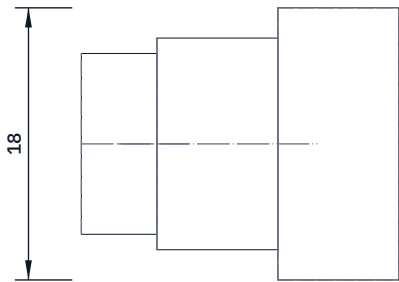


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

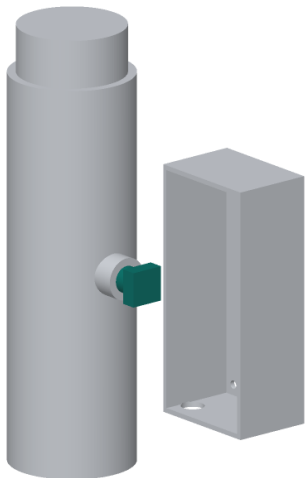

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn from 16 mm 316: an M12 x 1 nose 5 long, then a 14 dia body 8 long with two spanner flats 12 across.

Bore 5.4 through for the TO-46 photodiode can; counterbore from the outer end to suit the can's flange.

The nose's end face is flat and smooth: it presses the 10 x 3 quartz sensor window onto a 0.5 mm EPDM washer in the boss.

Fix the photodiode in the bore with UV-stable epoxy, window side facing the water. The amplifier (8 x 18 x 18) sits on the outer end; its lead runs to the enclosure gland.

Screw in by hand, then a quarter turn with a spanner.

Check: no light leaks round the nose when held to a lamp.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow photodiode holder: making sketch

DRAWING NO. LMF-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 316 stainless bar 16 mm; amplifier box bought					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand