


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

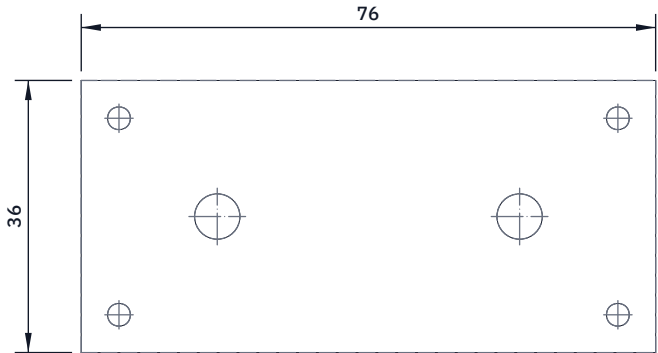

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

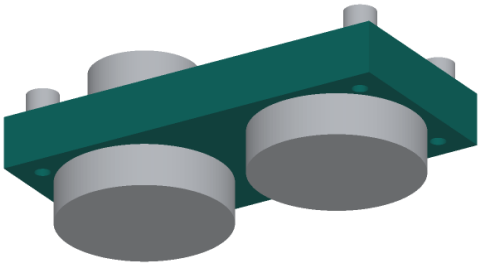

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a 76 x 36 mm blank from 10 mm aluminium plate; file the edges square and flat. Front view: the long face; top: the top face. Mark a centre line both ways. Sizes are from those centre lines. Magnet holes: two, 20 mm each side of centre on the long centre line. Drill 5.0 mm through and tap M6 through. The left one (boss end) also takes the boss's set screw from the top. Stand-off holes: four, 33 mm each side and 13 mm each side. Drill 2.5 mm through and tap M3 through. Use a drill press so the holes are square to the faces. Deburr; the top face must stay flat: the boss and stand-offs sit on it. Fit: magnets screw in from below, the boss on top over the left magnet, the four stand-offs on top at the corners. Check: an M6 screw turns in both holes by hand, square to the face.

MACHINEPULSE			github.com/BoujeeEnjinia1701/machinepulse		
MachinePulse sensor block: making sketch					
DRAWING NO. MPL - DWG - 101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium plate 10 mm, 6061 or clean scrap					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					