


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 2:1; looking down (along -Z)

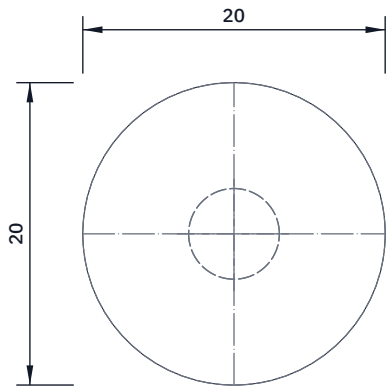


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

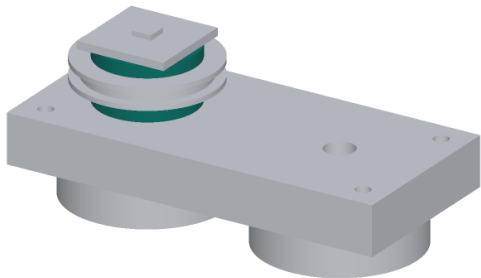

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Saw an 11 mm length off 20 mm round bar, leaving a little to file.
File both ends flat and square to the bar until it is 11 mm long.
Check squareness with an engineer's square on a flat plate.
Centre punch the bottom end. In a drill press, with the bar held upright in a V-block, drill 5.0 mm, 8 mm deep, and tap M6 8 deep.
The top end stays solid: the accelerometer board is bonded to it.
Break the sharp edges lightly; do not round the top face.
Fit: an M6 x 12 set screw goes half into the block's left magnet hole and half into the boss, with medium threadlocker. Screw the boss down hard so its bottom face sits flat on the block.
The boss rises through the box floor hole and its grommet; its top is 3.5 mm above the inside of the box floor.
Check: boss upright on the block, no rocking, top face flat.

MACHINEPULSE

github.com/BoujeeEnjinia1701/machinepulse

MachinePulse sensor boss: making sketch

DRAWING NO. MPL-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium round bar 20 mm, 6061 or 6082					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	