

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)




FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

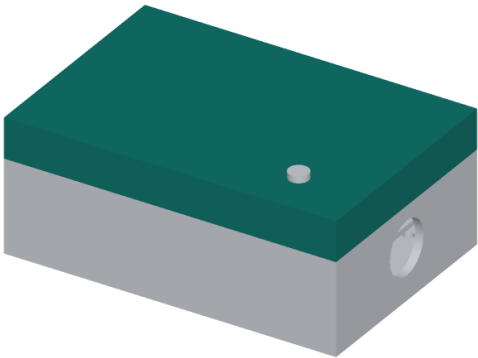

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

The lid of the same stock box, with its four corner screws.

One hole for the light pipe, 3.2 mm. Mark it on the outside face:

30 mm from the centre toward the right (CT gland) end and

20 mm from the centre toward the front edge.

Drill at low speed with wood behind; deburr both faces.

Check the light pipe's datasheet: some need a 3.0 mm press-fit hole.

Fit: the light pipe pushes up through the hole from inside until

its bezel sits on the lid's top face; a drop of silicone

sealant under the bezel keeps the box IP54.

The lid goes on last, its own gasket clean, with the box's four

screws tightened evenly in a cross pattern.

Check: the light pipe stands upright and lines up with the LED.

MACHINEPULSE

github.com/BoujeeEnjinia1701/machinepulse

MachinePulse lid: drilling sketch

DRAWING NO. MPL - DWG - 104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Lid of the bought IP54 ABS box (lid 12 mm)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand