


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

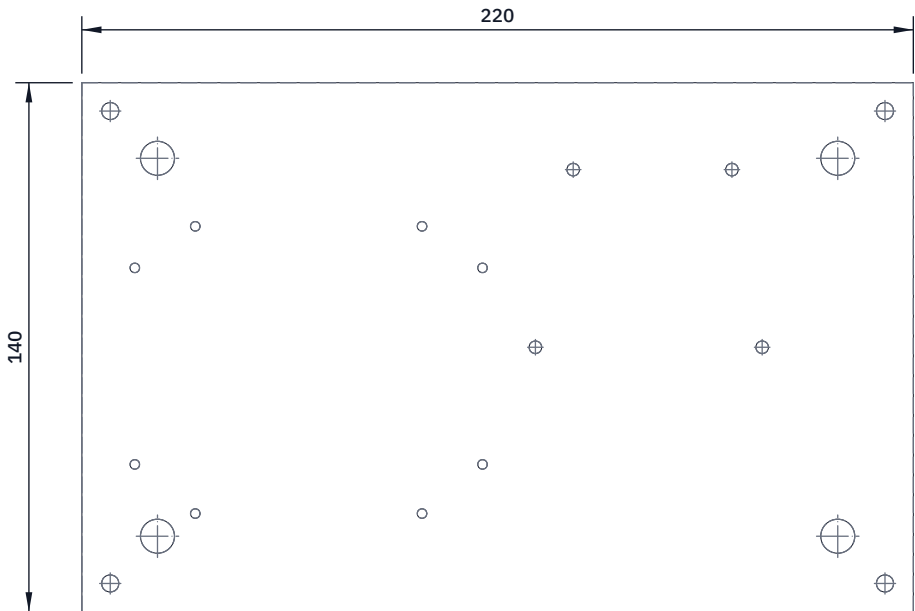

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

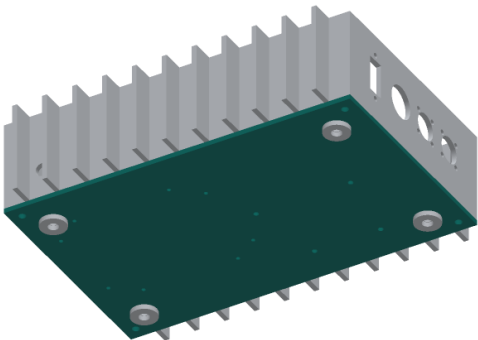

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 220 x 140 mm from 3 mm 6061 plate; square, deburr, corners left square.

Mark from the far end (opposite the sockets) and the socket side; the floor holes picture gives every position.

Rivet nut holes 9.0 mm at 20 and 200 from the far end, 20 and 120 from the socket side (the 180 x 100 mounting pattern).

Corner screw holes 4.5 mm, 7.5 from each edge; countersink from below to 8.4 mm so the M4 heads sit flush.

Tapped holes through the plate: M3 (2.5 drill) for the controller (4) and the supervisor standoffs (4); M4 (3.3 drill) for the contactor foot (2) and the fuse block (2).

Fit: the tube sits on its top face on a film of thermally conductive sealant; four M4 countersunk screws go up into the corner ports.

Check: lay the tube on it; the four corner holes line up with the ports.

MOTIONCORE			github.com/BoujeeEnjinia1701/motioncore		
MotionCore floor plate: making sketch					
DRAWING NO. MTC-DWG-101		REV P1	SHEET 1 of 1	SIZE ANSI B	
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES Aluminum plate 3 mm, 6061-T6					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		