

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

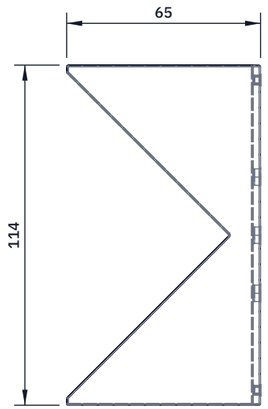


TOP VIEW

Scale 1:2; looking down (along -Z)

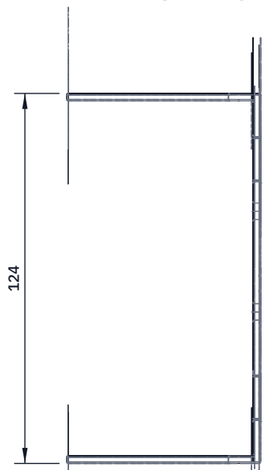


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

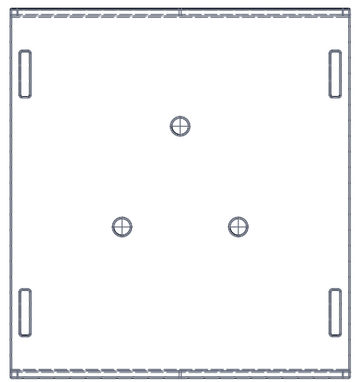

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

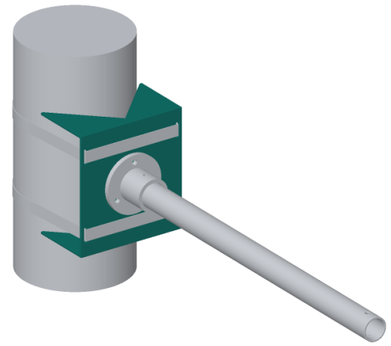

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A channel: web 114 wide x 124 tall, two flanges standing 65 out (outside sizes). Blank 114 wide; the bending shop sets its length.
Cut a 90 degree V in each end of the blank (these become the flanges): 109 mm wide at the end, point 54.5 mm in from the end.
Web: four band slots 3 x 15 at 52 mm each side of centre, centred 40 mm above and below the middle; chain drill 3 mm, file square.
Web: three 5.5 mm holes on a 45 mm circle round the middle, one straight up, for the tube flange.
Bend both flanges 90 degrees the same way, inside radius about 3.
Deburr and round the V edges so they cannot score the pole.
Fit: the pole bears on the four V edges; each band runs round the pole, through two slots and across the outside of the web.
Check: on a 114 mm tube all four V edges touch and it does not rock.

NOISEMAP github.com/BoujeeEnjinia1701/noisemap

NoiseMap arm saddle: making sketch

DRAWING NO.	REV	SHEET	SIZE
NSM-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Aluminium sheet 2.5 mm, 5052-H32 (bends without cracking)

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand