BUILD PLAN SKETCH, PLAN NOT YET BUILT


NoiseMap · github.com/BoujeeEnjinia1701/noisemap

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

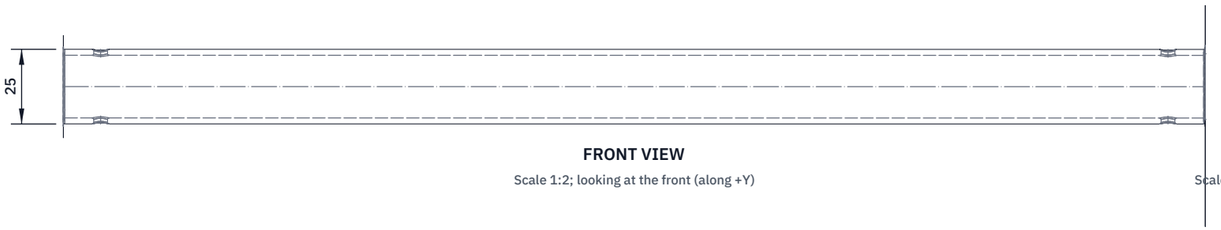


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

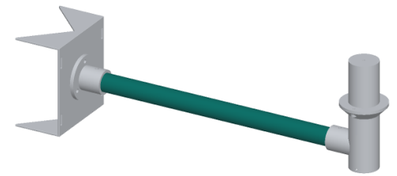

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 383 mm of 25 x 2 mm tube; square and deburr both ends.
Mark one end as the pole end.
Drill 4.6 mm straight through, top to bottom, 12.5 mm from the pole end (the flange cross bolt).
Drill 4.6 mm straight through, in the same plane, 12.5 mm from the far end (the head cross bolt).
Drill both holes on a drill press with the tube in a V-block so each hole passes through the centre line.
Fit: the pole end goes 25 mm into the tube flange's socket, the far end 25 mm into the head's socket; one bolt through each.
Check: both holes line up when you sight along the tube.

NOISEMAP

github.com/BoujeeEnjinia1701/noisemap

NoiseMap arm tube: making sketch

DRAWING NO.	REV	SHEET	SIZE
NSM-DWG-103	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Aluminium round tube 25 x 2 mm, 6063

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand