

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

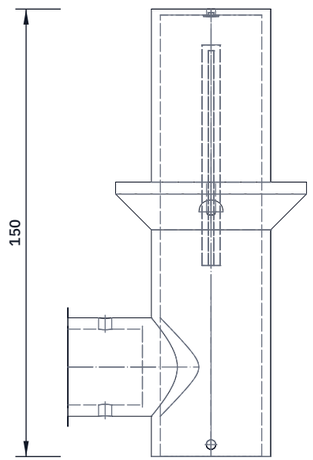


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

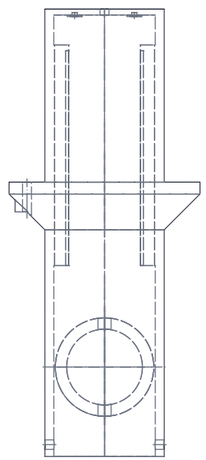

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

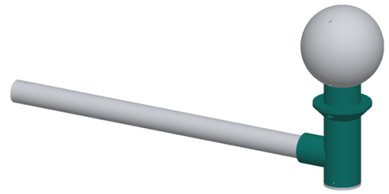

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Tube 40 OD x 3 wall x 150 tall, closed at the top by a 2 mm plate
with a 3 mm acoustic port on the axis.
Drip skirt 64 OD, its top 58 below the port; 45 degree cone under
it so it prints without support. Spike boss on it, 26 off the axis.
Arm socket 33 OD, bore 25.4, 25 deep, its axis 120 below the port;
4.4 mm cross hole 12.5 in from its open end, top to bottom.
Inside: two card guides with 1.8 mm slots for the processor board;
two 5 mm bosses under the top plate, 20 apart, for the mic board.
Two 3.2 mm holes 4 above the open end for the cap screws.
Print standing on the top plate, supports under the arm socket only.
Press an M3 heat-set insert into the spike boss.
Check: the port is clear; a 25 mm tube slides into the socket.

NOISEMAP github.com/BoujeeEnjinia1701/noisemap

NoiseMap head housing: making sketch

DRAWING NO.	REV	SHEET	SIZE
NSM-DWG-104	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

ASA, 3D printed, 4 walls, 40 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand