BUILD PLAN SKETCH, PLAN NOT YET BUILT

NoiseMap · github.com/BoujeeEnjinia1701/noisemap

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

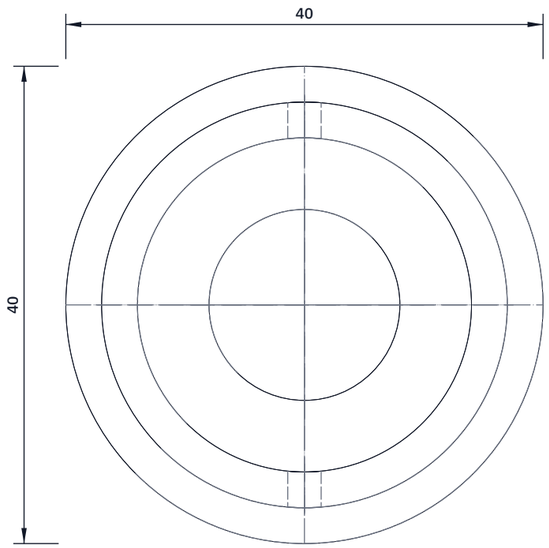

TOP VIEW

Scale 2:1; looking down (along -Z)

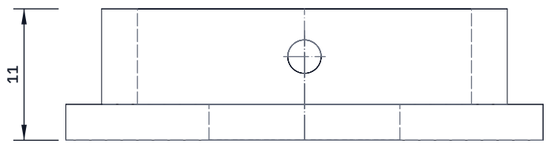

FRONT VIEW

Scale 2:1; looking at the front (along +Y)

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

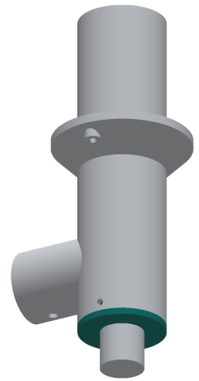

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Disc 40 OD x 3 thick with a ring standing 8 on it: 34 OD, 3 wall.
16 mm hole on the axis for the M16 cable gland.
Two 2.8 mm holes across the ring, 4 up from the disc, opposite each other, for the M3 screws (they self-tap into the ring).
Print disc down; no supports.
Fit: the ring slides into the open end of the head until the disc meets the tube; two M3 x 6 screws through the head wall.
The gland goes through the 16 mm hole from below, nut inside.
Check: the ring slides in by hand; the screw holes line up.

NOISEMAP

github.com/BoujeeEnjinia1701/noisemap

NoiseMap head bottom cap: making sketch

DRAWING NO.	REV	SHEET	SIZE
NSM-DWG-105	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
2:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

ASA, 3D printed, solid

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand