



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

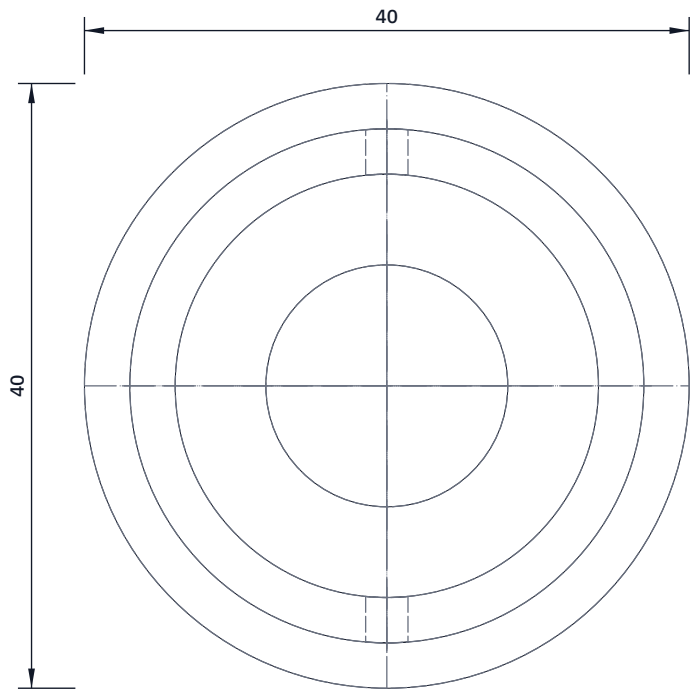


TOP VIEW

Scale 2:1; looking down (along -Z)

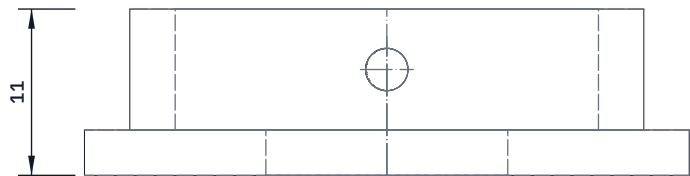


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

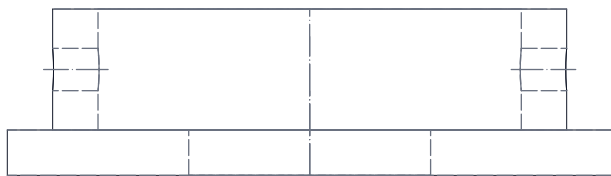

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

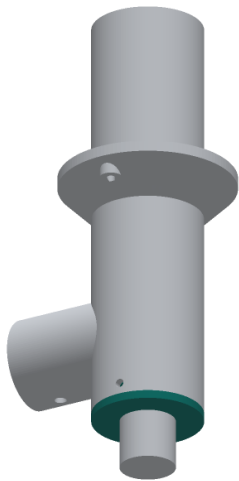

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Disc 40 OD x 3 thick with a ring standing 8 on it: 34 OD, 3 wall.

16 mm hole on the axis for the M16 cable gland.

Two 2.8 mm holes across the ring, 4 up from the disc, opposite each other, for the M3 screws (they self-tap into the ring).

Print disc down; no supports.

Fit: the ring slides into the open end of the head until the disc meets the tube; two M3 x 6 screws through the head wall.

The gland goes through the 16 mm hole from below, nut inside.

Check: the ring slides in by hand; the screw holes line up.

NOISEMAP

github.com/BoujeeEnjinia1701/noisemap

NoiseMap head bottom cap: making sketch

DRAWING NO. NSM-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed, solid					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	