



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

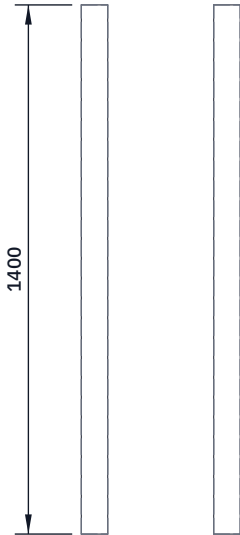


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

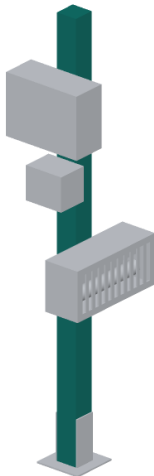

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 1,400 mm of 70 x 70 mm treated timber; seal the cut ends.

Bolt-down post anchor: drop the post in, drill through the anchor's side holes and bolt with two M10 coach bolts.

Mark the boxes on the front face (the face toward the turbine): rectifier box 840 to 960 mm up; controller box 1,030 to 1,230 mm.

Resistor guard on the side face, 540 to 700 mm up, with 50 mm air space all round and nothing that burns within 300 mm above it.

Fix each box with four stainless screws through its own mounting holes; cable glands face down.

Site: on ground above flood level, at least 1 m from the stream bank.

Check: the post stands upright and does not rock in its anchor.

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow equipment post: making sketch

DRAWING NO. PCF-DWG-114			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Treated timber 70 x 70 mm; bolt-down post anchor					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand