



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

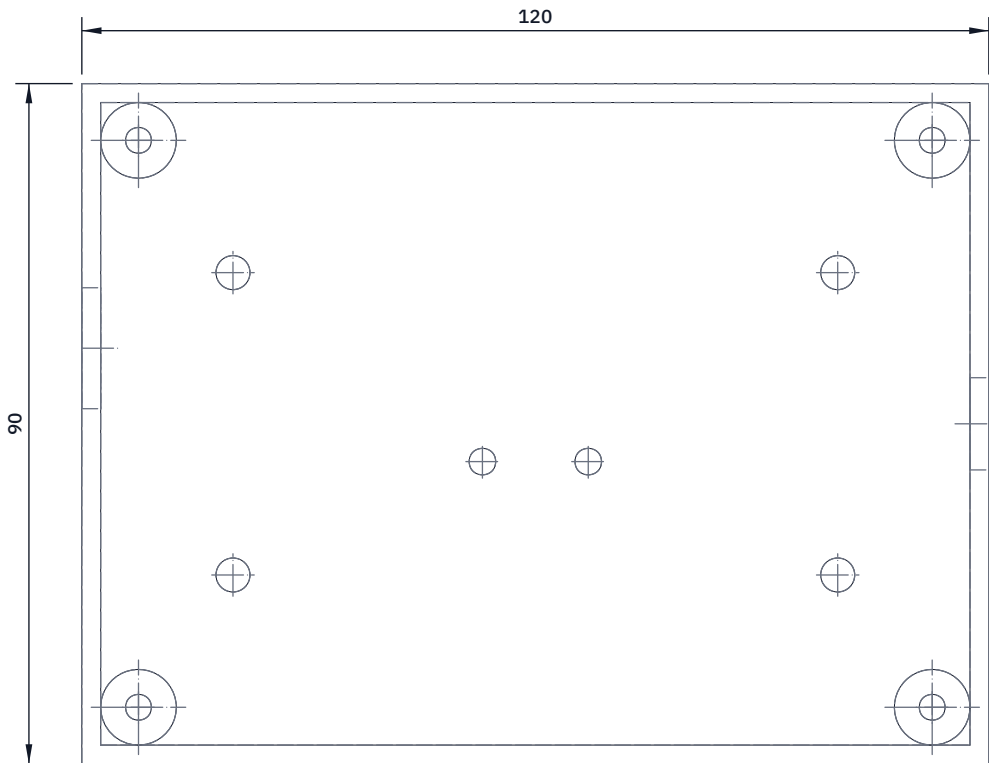

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

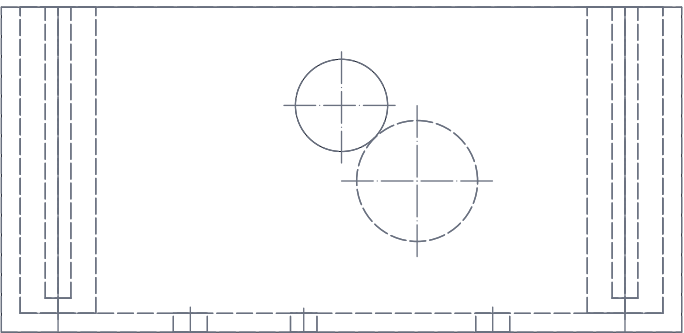

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

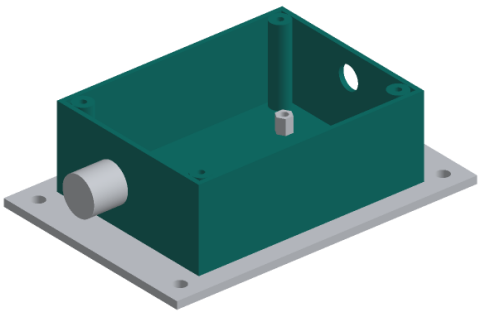

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bought box with four moulded corner pillars for the lid screws.

Floor, measured from its centre, front is away from the gland:
four 4.5 mm holes 40 mm each side along, 20 mm each side across;
two 3.5 mm holes 7 mm each side of centre, 5 mm to the right.

The floor holes must match the plate's tapped holes: drill them through the plate's holes with the box clamped on it.

Rear end wall: one 16.2 mm hole for the M16 gland, 10 mm left of centre, its centre 20 mm up from the box's underside.

Front end wall: one 12.2 mm hole for the M12 breather vent, on the centre line, its centre 30 mm up from the underside.

Tape the faces, pilot 3 mm at low speed with wood behind, open out with a step drill. No solvents: polycarbonate crazes.

Fit: the floor sits flat on the plate; a ring of neutral-cure silicone round each floor hole underneath seals it.

Check: no crack runs from any hole under a bright lamp.

POTHOLELOG

github.com/BoujeeEnjinia1701/potholelog

PotholeLog enclosure base: drilling sketch

DRAWING NO. PHL-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP65 polycarbonate box 120 x 90 x 55 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	