

POTHOLELOG · DESIGN PRECIS

PotholeLog design precis

Open Hardware Portfolio · amishchadha.com

DOCUMENT CONTROL

Document ID	PHL-PRC-001	Version	0.3
Status	Draft	Date	2026-09-25
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/potholelog		
Source	docs/02-concept.md @ 791b5db		

REVISION HISTORY

Version	Date	Author	Change
0.3	2026-09-25	Amish Chadha	TRL 3 update (numbers checked against PHL-CAL-001, design choices adopted per PHL-DDR-001, parametric model and drawing PHL-DWG-001, detection and transient findings)
0.2	2026-09-25	Amish Chadha	Populate to TRL 2 (architecture, first-order numbers, safety, media)
0.1	2026-09-25	Amish Chadha	Initial scaffold


PotholeLog design precis

■ Summary

PotholeLog is a sealed box, 120 x 90 x 55 mm on a 4 mm plate (59 mm overall), bolted to the floor of a bus or refuse truck above the rear axle. It records how the vehicle shakes and where it is, turns each 100 m of road into a roughness value and flags sharp impacts as possible potholes, then uploads a small daily file over depot Wi-Fi. Averaged over many passes and calibrated per vehicle, the data gives a city a weekly map of road condition on every street its fleet drives. The TRL 3 calculations (PHL-CAL-001) show that off-the-shelf modules meet the sampling, storage, hold-up and power needs for \$69 in parts, just inside the \$70 budget, and that the roughness signal is well above sensor noise. They also show two limits. A bus tyre bridges most of a 300 mm pothole, so the floor-mounted logger finds the R1 reference pothole only at low speed (up to about 20 km/h on a fair road, 50 km/h on a good one), and the 36 V converter does not survive a load dump on a 24 V vehicle. Detection accuracy and calibration to IRI remain unverified until field data exist.

PotholeLog

CONCEPT, NOT FOR FABRICATION

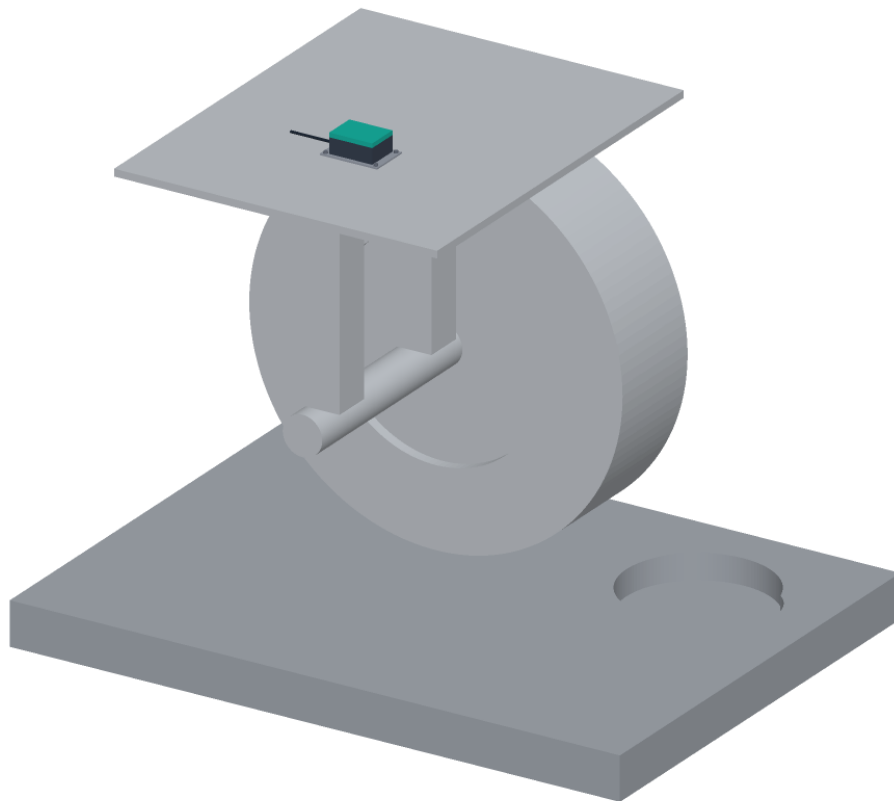

Grey: Road with pothole, Wheel, axle, suspension and floor section for scale

Figure 1. Concept massing model. The logger is the small dark box on the floor section; the grey scene is for scale.

■ How it works

1. **Sense.** A 6-axis IMU rigidly fixed to the enclosure floor samples acceleration at 400 Hz. A GNSS module under the lid logs position and speed at 10 Hz.
2. **Log raw data.** Raw samples go to a microSD card as a rolling buffer, so any detection can be re-run later with a better algorithm.
3. **Summarize on board.** For every 100 m traveled, the controller computes a roughness value from the vertical acceleration (band-limited RMS from 0.5 to 20 Hz, tagged with its speed band for calibration), and records the segment's start and end, speed and the number of samples. Sharp vertical impacts above a threshold are stored as defect events with position, speed and peak size; the front and rear axle impacts of the same defect, about 0.4 to 0.7 s apart in town, are paired to confirm the event and place it at the rear axle.
4. **Upload.** When the vehicle is back within depot Wi-Fi with the ignition on, on arrival or at the next start, the controller joins the network and uploads the day's summaries (about 112 kB, about 8 s) to the fleet's server. The hold-up capacitor cannot power Wi-Fi long enough to upload after the ignition is switched off.
5. **Calibrate and aggregate.** On the server, each vehicle's raw roughness is converted to an IRI estimate using a calibration equation found on reference sections, in the way World Bank Technical Paper 46 describes for response-type systems (Sayers et al., 1986). Events from several passes and vehicles are clustered; a cluster seen on repeated passes becomes a reported defect, as in Pothole Patrol (Eriksson et al., 2008).
6. **Publish.** The city publishes a map of segment roughness and defect clusters as CSV and GeoJSON, for its own GIS and for CityTwin. Vehicle tracks and timestamps stay on the operator's server.

PotholeLog: data flow (values from PHL-CAL-001; road data only, no images or audio)

CONCEPT, NOT FOR FABRICATION




Figure 2. Data flow. Values from PHL-CAL-001.

■ Main components

Table 1. Main components. Numbers match the exploded view (Figure 3), `cad/src/model.py` and `bom/bom.csv`.

#	Component	Proposed choice	Notes
1	Mounting plate	160 x 110 x 4 mm aluminum, 4 x M6 on 140 x 90 mm	Bolts to existing crossmember, seat-rail or floor fixings; first mode about 186 Hz on corner bolts
2	Enclosure base	Stock IP65 ABS or polycarbonate box, 120 x 90 mm	IMU screwed directly to its floor
3	Enclosure lid	Supplied with the box, with gasket	GNSS antenna under the lid; plastic lid keeps sky view through vehicle windows
4	DC-DC converter and protection	9 to 36 V in, 5 V 1 A out; TVS diode, reverse-polarity diode, input fuse	Covers normal 12 V and 24 V supplies; not a 24 V load dump (58 V). A 60 V part is proposed, awaiting Amish
5	Hold-up supercapacitor	1 F, 5.5 V, rated to 70 °C or more	About 7 s at end of life to close files when power drops
6	Controller	ESP32-S3 board with Wi-Fi and microSD slot; module variant rated to 85 °C	Adopted as recommended for TRL 3 (PHL-DDR-001, D4)
7	IMU	6-axis, LSM6DSO class, ± 16 g, 400 Hz or more	Gyroscope helps separate body roll and pitch from vertical motion
8	GNSS module	u-blox M10 class with patch antenna, 10 Hz, PPS output	Multi-constellation; PPS time-stamps the IMU samples
9	Cable gland and fused lead	M16 gland, 2 m lead, inline 2 A fuse	Wired to an ignition-switched fused circuit
10	microSD card	32 GB high-endurance, -25 to 85 °C	133 to 160 days of raw data
11	Fixings	4 x M6 (8.8) with locking nuts and washers; 4 x M4 box screws	Crash load is small; loosening needs a later test

PotholeLog: exploded view

CONCEPT, NOT FOR FABRICATION

- 1 Mounting plate, aluminum
- 2 Enclosure base, IP65
- 3 Enclosure lid with gasket
- 4 DC-DC converter and protection
- 5 Hold-up supercapacitor
- 6 Controller, Wi-Fi, microSD slot
- 7 6-axis IMU
- 8 GNSS module and patch antenna
- 9 Cable gland and fused lead
- 10 microSD card, 32 GB
- 11 M6 bolts, washers, locking nuts

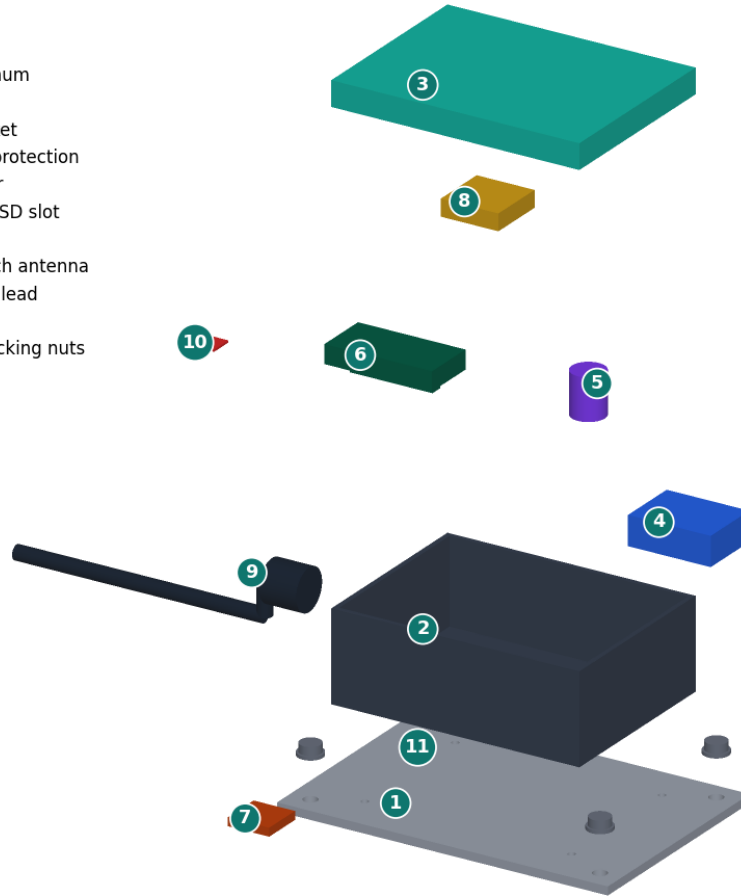


Figure 3. Exploded view with numbered callouts matching the BOM.

PotholeLog: cutaway

CONCEPT, NOT FOR FABRICATION

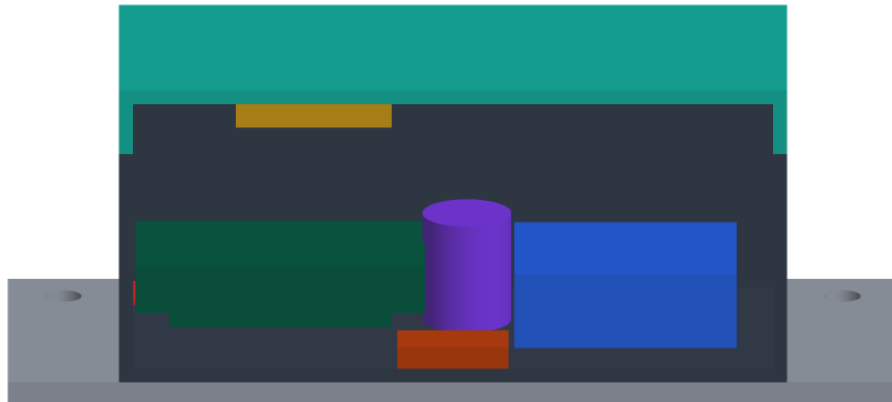


Figure 4. Cutaway on the plane through the IMU. The IMU sits on the enclosure floor, the controller, supercapacitor and converter behind it, and the GNSS module under the lid.

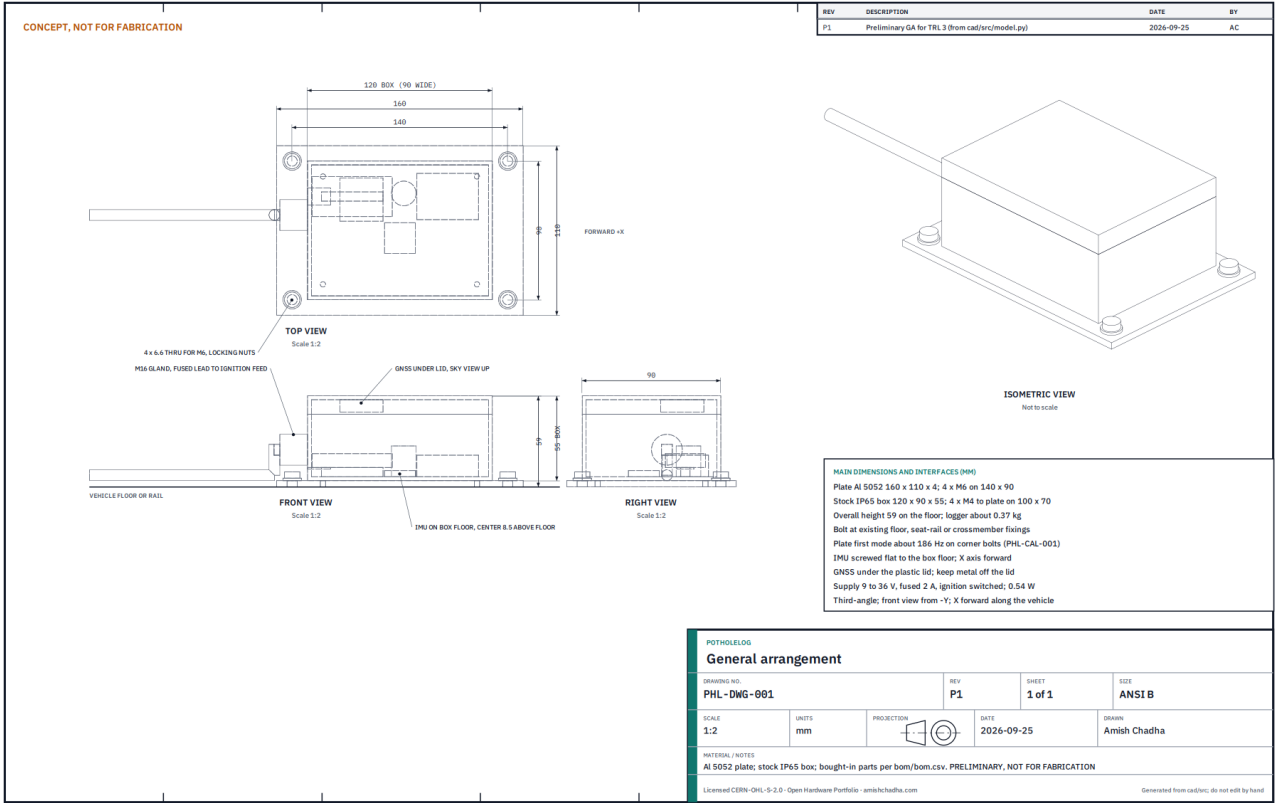


Figure 5. General arrangement PHL-DWG-001, Rev P1, generated from `cad/src/model.py` (PDF). Preliminary, not for fabrication.

■ Key numbers

All values are from PHL-CAL-001 v0.1 (docs/04-calcs/sizing.py), which states the assumptions; they are calculations for review, not measurements.

Table 2. Key numbers.

Quantity	Value	Basis	Requirement
Sample spacing on the road	35 mm at 50 km/h, 56 mm at 80 km/h	400 Hz	R6
Samples across a 300 mm pothole	9 at 50 km/h, 5 at 80 km/h	Length divided by spacing	R1
Tyre drop into a 300 mm pothole	22 mm, whatever its depth	1.04 m tyre, rigid-circle envelope	R1
Pothole detection margin	Above 1 up to about 20 km/h (IRI 4) and 50 km/h (IRI 2); 0.30 to 0.59 at 80 km/h	Quarter-car model against roughness crossing once per km	R1, R5 not met
Roughness signal against noise	12 times at 20 km/h on a smooth road	0.5 to 20 Hz band	R5
Synthetic calibration	r^2 0.93 from one pass, 0.99 from five	40 sections, IRI 1 to 8 m/km	R3
Location, 95 %	2.3 m suburban, 18.2 m dense urban (10 passes)	M10-class GNSS with PPS	R4 at risk
Raw data	5.23 kB/s; 188 MB per 10 h day	6 axes x 16 bit at 400 Hz, plus GNSS and time stamps	
Raw storage on a 32 GB card	133 to 160 days	10 to 12 h of driving a day	R7 met
Summaries per day	112 kB, uploaded in about 8 s	200 km, 48 B segments, 500 events at 32 B	R8 met
Running power	0.54 W; 1.42 W for about 8 s while uploading	Loads 91 mA at 3.3 V, linear regulator, 85 % converter	R9
Supply current	45 mA at 12 V, 22 mA at 24 V	From running power	
Hold-up time	10.0 s new, 7.0 s at end of life	1 F from 4.7 V to 3.6 V	R10 met; 1 s needed
Inside temperature	About 72 °C at +70 °C ambient	2.0 K self-heating	R11 at risk
Plate first mode	186 Hz on corner bolts	4 mm aluminum, 140 mm span	R12 met on paper
Installation	30 min	Task estimate	R12 at the limit
Size	120 x 90 x 55 mm box on a 160 x 110 x 4 mm plate, 59 mm overall	<code>cad/src/model.py</code>	
Mass	0.37 kg; 0.51 kg with lead and fixings	Model volumes and module masses	
Parts cost	\$69.00	<code>bom/bom.csv</code>	R15 met with \$1 margin

■ Key design choices

The choices below were proposed at TRL 2. Each is now adopted as recommended for TRL 3 under Amish's 2026-09-25 instruction and remains open for his review (PHL-DDR-001).

- **Sprung-mass mount on the floor, not on the axle.** The floor is clean, dry and easy to reach, and the GNSS can see the sky through the windows. The axle would give a stronger, less filtered signal but sees large shocks, water and stones. Calibration per vehicle corrects for the suspension. PHL-CAL-001 supports the choice: the axle would see about 9 g, 65 times the floor peak.
- **Depot Wi-Fi upload, not cellular.** It keeps parts cost within \$70 and avoids data plans. Cellular (for example an LTE-M module) would give same-day data but adds about \$20 to \$30 per unit and a monthly fee; it stays an optional add-on, costed separately.
- **Raw data kept on the card.** Storage is cheap, and raw data lets the detection method improve without new hardware.
- **Summaries and events, not tracks, leave the vehicle's operator.** Only road-level results are published (R13).
- **Controller, IMU and GNSS.** ESP32-S3 (Wi-Fi, low cost, wide community), an LSM6DSO-class IMU and a u-blox M10-class GNSS. The alternatives considered were an RP2040 board with a separate Wi-Fi module and an nRF52 board with a phone or gateway for upload.
- **100 m segments and point events, in CSV and GeoJSON** following the CityTwin open data export.
- **Bicycles later.** This build serves buses and refuse trucks; a bicycle variant with its own battery and mount is a later step, and the pitch is unchanged.
- **Built on existing lab work where it fits.** Outputs are proposed to follow the CityTwin open data export so PotholeLog segments can appear on the CityTwin map; CityTwin is built on TwinKit. PotholeLog does not use FieldNode, because it runs from vehicle power rather than solar and uploads at the depot rather than over LoRaWAN.

■ Safety

Safety: PotholeLog is fitted to vehicles that carry passengers and operate in traffic.

- **Secure mounting.** A loose box can become a projectile in a crash or hard stop. Bolt the plate through with M6 bolts and locking nuts at existing fixing points, never with adhesive or magnets alone. Do not cut, drill or weld chassis members or safety-critical structure; follow the fleet operator's and vehicle maker's rules for body fittings.
- **Vehicle electrics.** Connect only to a fused, ignition-switched circuit through the inline fuse, with the battery isolated during installation. Route the lead away from moving parts, hot surfaces and sharp edges, and protect it where it passes through panels. A short on a 24 V vehicle supply can start a fire. The 36 V converter in the current BOM is not rated for a 24 V load dump (PHL-CAL-001, F4); do not fit it to a 24 V vehicle without a 60 V-rated input stage.
- **Working on vehicles.** Install only with the vehicle parked, secured and switched off. Never work under a vehicle supported only by a jack.
- **Driver distraction.** The logger has no controls or display and must not be handled while the vehicle is moving.
- **Sharp edges.** Deburr the aluminum plate.
- **Supercapacitor.** It stays charged for a short time after power is removed; do not short its terminals.

- **Data.** Vehicle location data can reveal where drivers are and when. Keep tracks on the operator's server under the operator's data policy, inform drivers and unions before a pilot, and publish only road-level results.

This is a research prototype. It is not certified to automotive electrical or EMC standards, and its outputs must not be used for contract acceptance or safety decisions without validation against a calibrated reference.

■ Open questions

- Which defect-detection target should apply, given that a bus tyre bridges a 300 mm pothole at speed (R1, R5)? Options are in `docs/REVIEW.md`, awaiting Amish.
- Should the converter be rated to 60 V for 24 V vehicles, at about \$2 more and \$1 over budget (R9)? Awaiting Amish.
- How far off is GNSS in the partner city's densest streets, and is map matching needed for R4?
- How will CityTwin receive the operator's daily segment files, given that its gateway accepts no inbound connections? To agree with CityTwin.
- Which host fleet and city for a first pilot, and who provides reference IRI? Proposed, awaiting Amish.
- Should a bicycle variant be developed later, and with what battery and mount (R16)?

Concept media: [blueprint sheet](#), [interactive 3D model](#). Calculations: [PHL-CAL-001](#). Decisions: [PHL-DDR-001](#).