



| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-09-30 | AC |

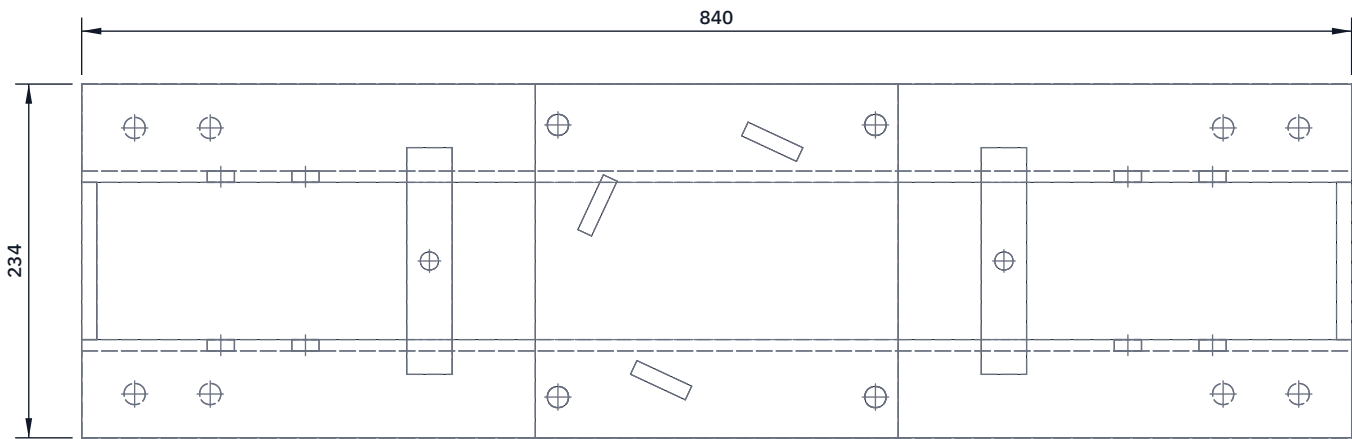


TOP VIEW

Scale 1:5; looking down (along -Z)

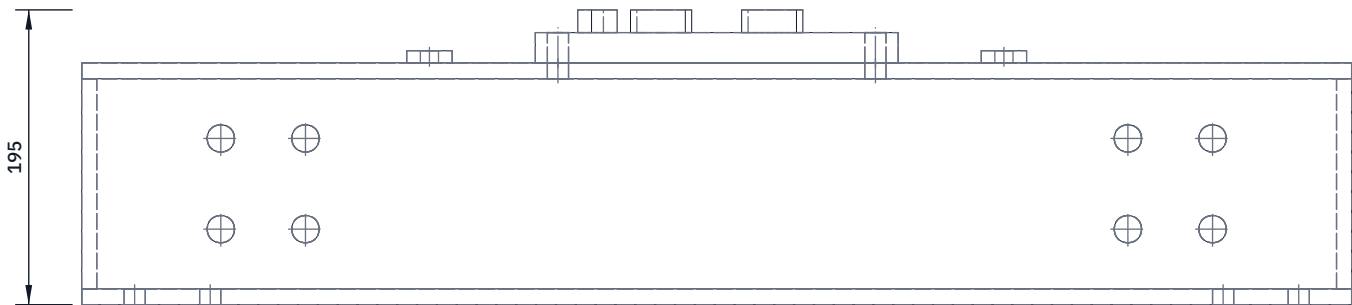


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

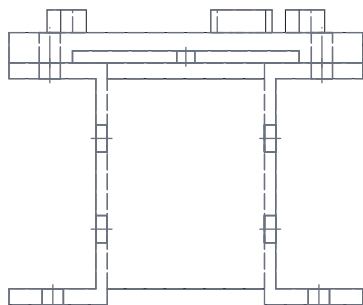

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

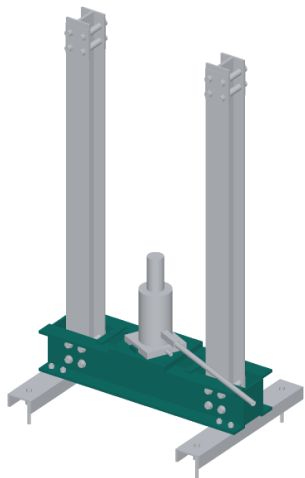

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two UPN 160 channels 840 mm long, webs 104 mm apart (inside faces), flanges pointing out. Weld a 10 x 104 x 139 mm block between the webs at each end, flush with the ends. The gap takes the uprights plus shims. Joint holes, 18 mm, through both webs: at 272, 328 (right) and -272, -328 (left) mm from the middle; 50 and 110 mm up from the beam bottom. Drill the two channels clamped together so the holes line up. Stud holes, 14 mm, in the bottom flanges: 335 and 385 mm each side of the middle, 88 mm each side of the centre line. Spring lugs: 30 x 150 x 8 mm flat bar across the top flanges, 190 mm each side of the middle, 12 mm hole in the centre; weld both sides. Jack plate: 240 x 234 x 20 mm, four 14 mm holes at 105 and 90 mm from its middle; bolted across the top flanges with 4 x M12 (matching holes). Weld three 10 x 40 x 15 mm blocks round the jack base, 82 mm out, at 90 degrees; leave the right front open for the release valve. Check: webs parallel within 1 mm; the uprights slide in with shims.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress base beam and jack plate: making sketch

|                                                                                   |             |                                                                                                     |                                             |                 |                       |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------|-----------------|-----------------------|
| DRAWING NO.<br>PPR-DWG-102                                                        |             |                                                                                                     | REV<br>P1                                   | SHEET<br>1 of 1 | SIZE<br>ANSI B        |
| SCALE<br>1:5                                                                      | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-09-30                          |                 | DRAWN<br>Amish Chadha |
| MATERIAL / NOTES<br>Two UPN 160 channels 840 mm; plate 20 mm; flat bar 8 mm; S275 |             |                                                                                                     |                                             |                 |                       |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com                |             |                                                                                                     | Generated from cad/src; do not edit by hand |                 |                       |