



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

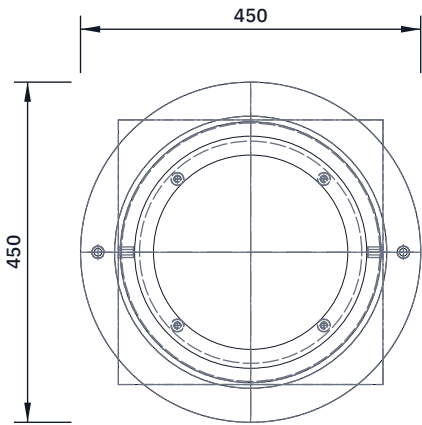


TOP VIEW

Scale 1:10; looking down (along -Z)

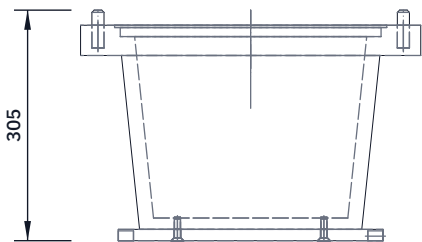


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

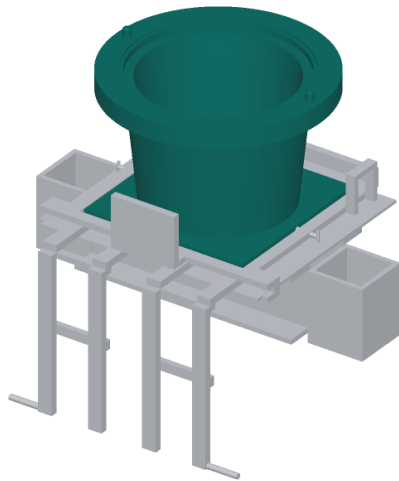

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cast cup: flange 450 mm dia x 40, cavity the pot's outside (257 mm at the floor, 310 mm at the rim, 255 deep), 20 mm shell, 15 mm floor, rim counterbore 345 x 15, flash groove to 360 x 3 deep.

Pattern: printed in PLA, flat-back, flange face down on the board; the cavity forms its own sand core. Add 1.3 % shrink, 3 mm to lap off the flange face and the base, 2 degree draft on the rim.

Finish: lap the flange face (stop ring 360 to 450) flat on abrasive paper on float glass; finish the cavity to printed templates.

Base plate: 350 x 350 x 15 mm, four 9 mm countersunk holes on the diagonals, 137 mm from the middle; 14 mm holes 20 deep in two edges.

Bed the cup on steel epoxy putty and hold it with 4 x M8 screws.

Dowels: 16 mm hardened, 50 long, pressed 30 deep at 202 mm each side; drilled with the male mold clamped on (see the joint picture).

Check: templates within 0.3 mm; lead-free note from the foundry.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress female mold: making sketch

DRAWING NO. PPR-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Sand-cast aluminium (lead-free scrap); 15 mm S275 plate; 16 mm dowels					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	