



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

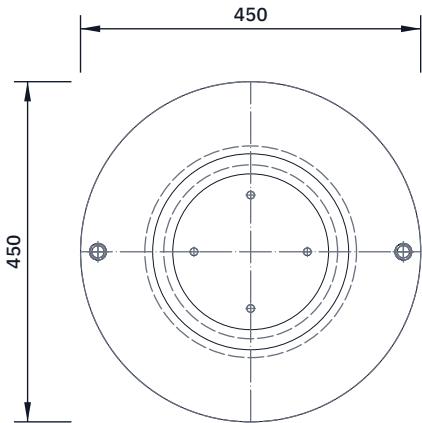


TOP VIEW

Scale 1:10; looking down (along -Z)

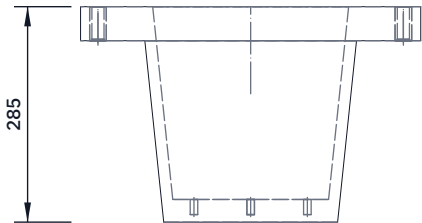


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

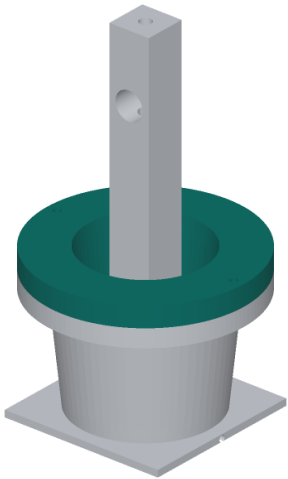

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cast plug: 230 mm dia at the tip to 280 at the flange, 240 long; 15 mm shell, 30 mm tip; flange 450 dia x 45. Open at the top: the inside is a cone 206 dia at the floor to 259 at the top (draft 6 deg).
Pattern: printed PLA, flat-back, flange top face down on the board, plug pointing up; the inside forms its own sand core, so no core box. Add 1.3 % shrink, 3 mm to lap off the flange underside, 2 degree draft on the flange rim. Print in 8 segments, glue, seal.
Finish: lap the flange underside flat; plug to printed templates.
Bushes: 22 mm holes through the flange at 202 mm each side, steel bushes 22 x 16 x 45 set in retaining compound; 16 mm bore reamed.
Floor: four M12 holes (drill 10.2, tap 20 deep) at 75 mm from the middle, square to the axes, for the stem's adapter disc.
Check: plug to templates within 0.3 mm; bushes slide on the dowels.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress male mold and its casting pattern: making sketch

DRAWING NO. PPR-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Sand-cast aluminium (lead-free scrap); 22 mm steel bushes					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand