
REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

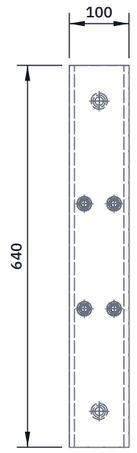


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

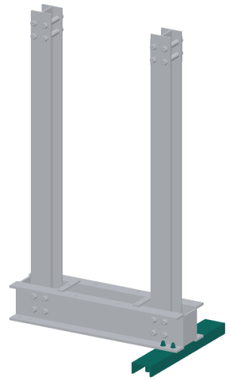

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut UPN 100 channel 640 mm long. It lies web up: the flat 6 mm web on top, the two 50 mm flanges standing on the floor.

Anchor tubes: 14 mm hole through the web 260 mm each side of the middle; weld a 26.9 x 3.2 mm tube, 44 mm long, under each hole, floor to web.

Studs: four 13 mm holes in the web, 25 mm each side of the centre line (lengthwise) and 88 mm each side of the middle. Put an M12 x 40 bolt up through each from below and weld its head under the web.

Fit: the base beam's bottom flanges sit flat on the web; the studs go through them, nut and washer on top. The upright stands on the web.

Floor: M12 anchors, 80 mm into concrete, down through the tubes.

Check: the web is flat and the four studs stand square and at 50 mm and 176 mm spacing.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress foot (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
PPR-DWG-101	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-09-30	Amish Chadha

MATERIAL / NOTES

UPN 100 channel, S275; 26.9 x 3.2 mm tube; M12 bolts

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand