BUILD PLAN SKETCH, PLAN NOT YET BUILT

PotPress · github.com/BoujeeEnjinia1701/potpress

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-09-30 | AC |

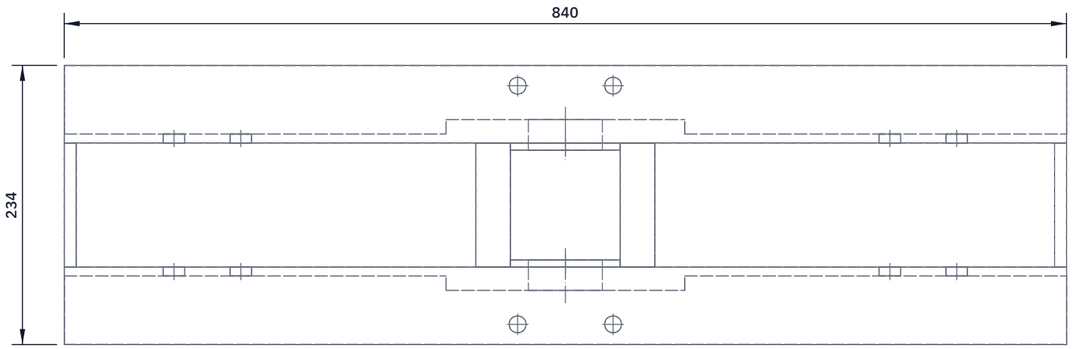


**TOP VIEW**

Scale 1:5; looking down (along -Z)

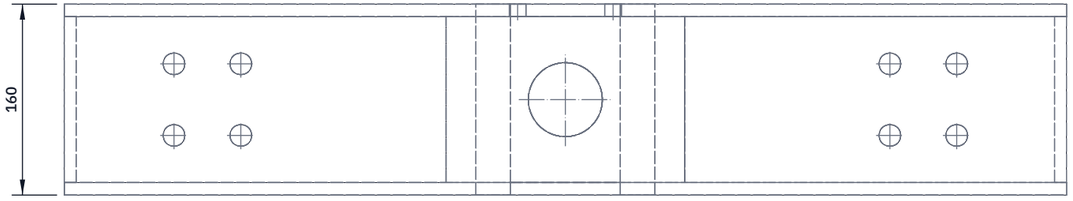


**FRONT VIEW**

Scale 1:5; looking at the front (along +Y)



**RIGHT VIEW**

Scale 1:5; looking at the right side (along -X)

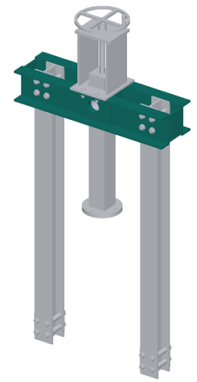

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

As the base beam: two UPN 160 channels 840 mm, webs 104 mm apart, 10 mm end blocks, joint holes 18 mm at 272 and 328 mm each side, 50 and 110 mm up from the beam bottom.
Doublers: 12 x 200 x 139 mm plate, one on the outside of each web, in the middle, 6 mm fillet weld all round.
Pin bore: 62 mm through both webs and doublers, 80 mm up (mid-height). Clamp the channels together and cut both with a 62 mm annular cutter (hired magnetic drill); weld the end blocks with a 60 mm bar through.
Bracket holes: four 14 mm in the top flanges, 40 mm each side of the middle, 100 mm each side of the centre line.
Guides (UHMW-PE): two blocks 29 x 104 x 160 mm, 46 to 75 mm each side of the middle; two 6 x 92 x 139 mm strips on the webs with 62 mm holes on the pin. Two M6 countersunk screws each, through the web.
Fit: the stem slides between the guides with 1 mm each side.
Check: a 60 mm bar slides through both bores by hand.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

# PotPress top crossbeam with doublers and guides: making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| PPR-DWG-104 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:5 | mm | | 2026-09-30 | Amish Chadha |

MATERIAL / NOTES

Two UPN 160 channels 840 mm; 12 mm plate; UHMW-PE; S275

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand