



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

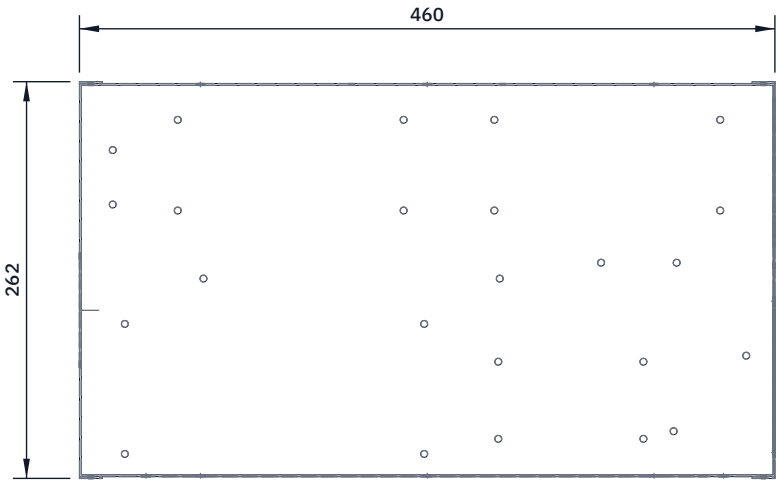

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

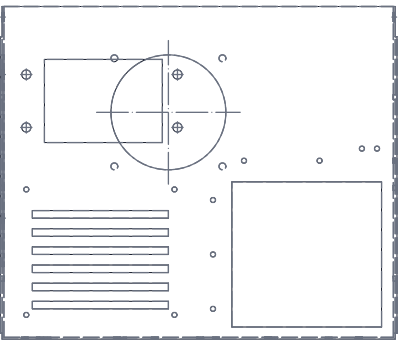

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

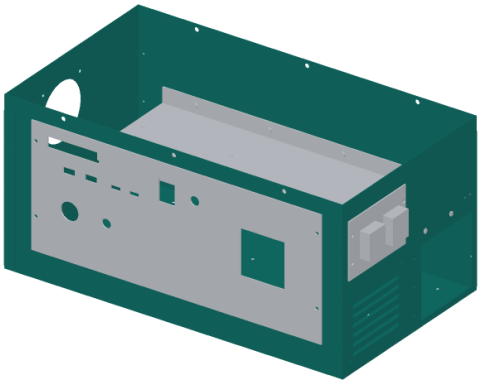

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One blank, about 900 x 700 mm before folding; the shop sets bend allowances.

Floor 460 x 260; walls 220 tall. End walls carry 15 mm tabs that fold onto the outside of the long walls: 3 blind rivets each, 40, 100, 160 up.

Front wall: window 360 x 140, 55 from the left end, 48 to 188 up.

Rivet nuts (6.0 holes): 44 and 426 from the left end, 80 and 175 up; and for the lid, 80, 230 and 380 from the left end, 213 up.

Back wall: lid rivet nuts as the front; shelf rivets 3.3 mm at 80, 180, 280 and 380 from the fan end, 118 up.

Fan end: a 76 mm hole centred 110 from the front edge and 150 up, with four 4.5 mm holes on a 71.5 mm square round it. Door end: see its layout.

Floor: 24 holes of 4.5 mm; see the floor layout picture.

Deburr every edge. Set the rivet nuts with a hand rivet nut tool.

Check: square within 1 mm over the diagonals; lid sits on all walls.

POWERBOX				github.com/BoujeeEnjinia1701/powerbox			
PowerBox enclosure body: making sketch							
DRAWING NO. PBX-DWG-101			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES 5052 aluminium sheet 1.2 mm, folded; 14 M4 rivet nuts							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	