


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

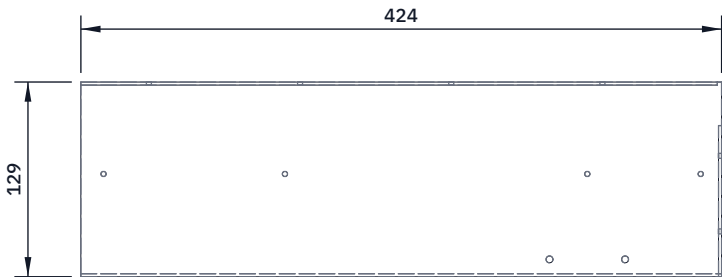

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

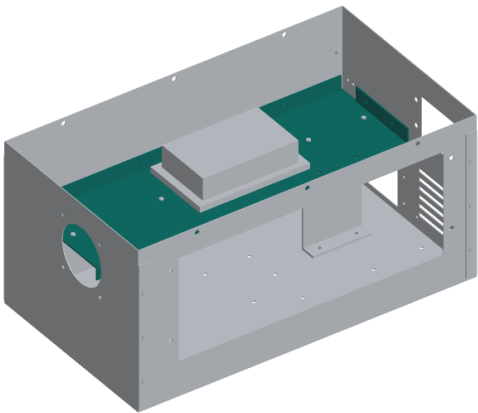

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Deck 423.8 x 128.8 mm. Fold up a 20 mm rear flange (stop it 2.8 mm short of the right end), a 20 mm right end flange 100 long from the front edge, and fold down a 15 mm front flange along the front edge.

Rail screw holes 3.4 mm, 68 back from the front edge, 15, 135, 335 and 410 from the left end.

Catch bracket holes 4.5 mm, 11.5 back from the front edge, 310 and 360 from the left end.

Rivet holes 3.3 mm, 10 above the deck: rear flange 45, 145, 245, 345 from the left end; end flange 30 and 80 from the front edge.

Fit: drops into the case onto the catch bracket; drill the walls through the flange holes and rivet. Deck top 108 above the case underside.

Check: the deck is flat within 1 mm and level side to side.

POWERBOX				github.com/BoujeeEnjinia1701/powerbox			
PowerBox shelf: making sketch							
DRAWING NO. PBX-DWG-104			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES 5052 aluminium sheet 2 mm, folded							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	