


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

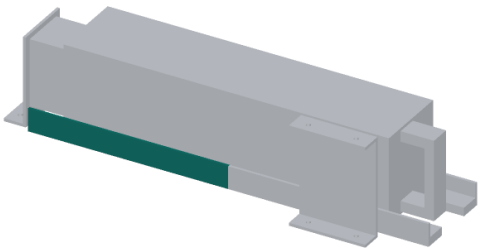


WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

An L section: base 24 wide x 8.8 tall, lip 3 wide rising 15 above it.
Print four, each 209.4 long, lying on the base; all four are the same.
Two holes 5.6 mm, 8 deep, from below, 14 in from the lip's outer face:
25 from one end and 35 from the other. Press in M4 heat-set inserts.
Fit: two lengths end to end along the front of the bay and two along
the back, lips on the outside, starting 38.8 from the inside of the fan end.
Each held by two M4 button heads from under the floor.
The pack rests on the bases; the lips stand 1 mm off its sides.
Check: the joints between lengths are flush; the pack slides from
end to end without catching.

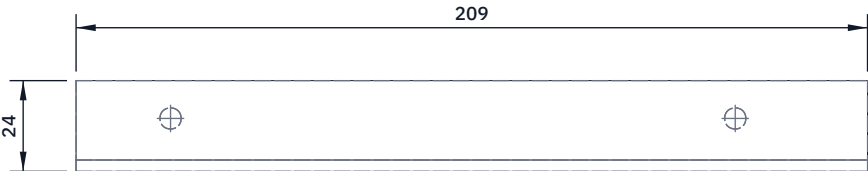

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

POWERBOX

github.com/BoujeeEnjinia1701/powerbox

PowerBox floor runner (make 4): making sketch

DRAWING NO. PBX-DWG-107			REV P1		SHEET 1 of 1		SIZE ANSI B	
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-01			DRAWN Amish Chadha	
MATERIAL / NOTES PETG, 3D printed, 4 walls, 40 % infill								
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com								
Generated from cad/src; do not edit by hand								