


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

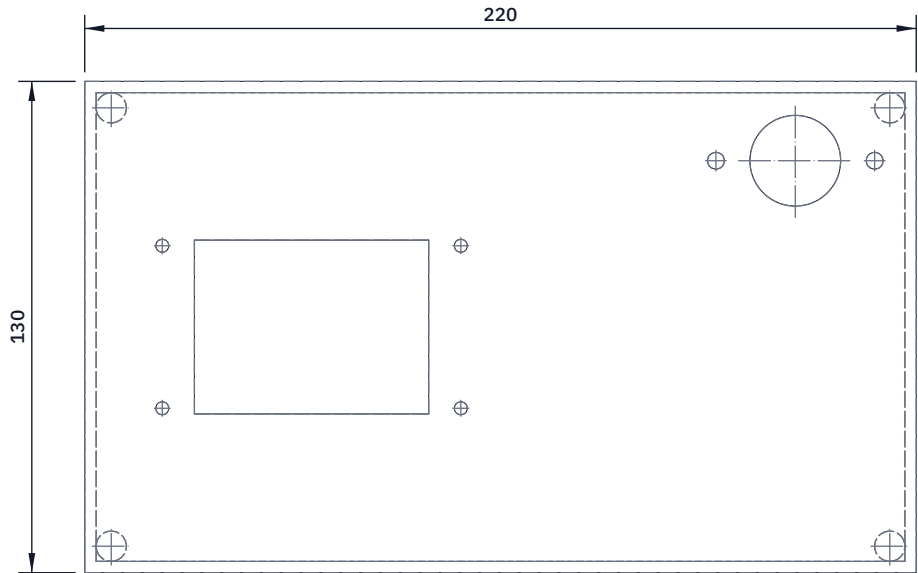


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

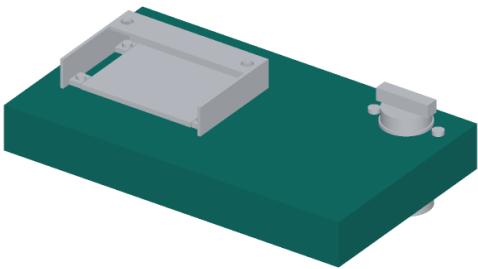

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Positions from the lid's left end and front face, outside, top view.

Display opening 62 x 46 mm, centred 60 from the left end and 65 from the front: drill the corners 6 mm, cut between with a fine saw, file.

Four 3.4 mm holes for the display screws at 20.5 and 99.5 from the left end, each 43.5 and 86.5 from the front.

DC isolator: 24 mm hole centred 188 from the left end and 109 from the front; two 4.4 mm holes 21 mm each side of it, left and right.

Check the isolator maker's cut-out before cutting; follow it if it differs.

Tape the face, cut slowly, deburr; clean with soap and water.

Check: the window covers the opening with 4 to 5 mm all round; the hood's four tabs line up with the four small holes.

PVTRACE			github.com/BoujeeEnjinia1701/pvtrace		
PVTrace lid: cutting and drilling sketch					
DRAWING NO. PVT-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Lid of the bought case, ABS 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	