



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

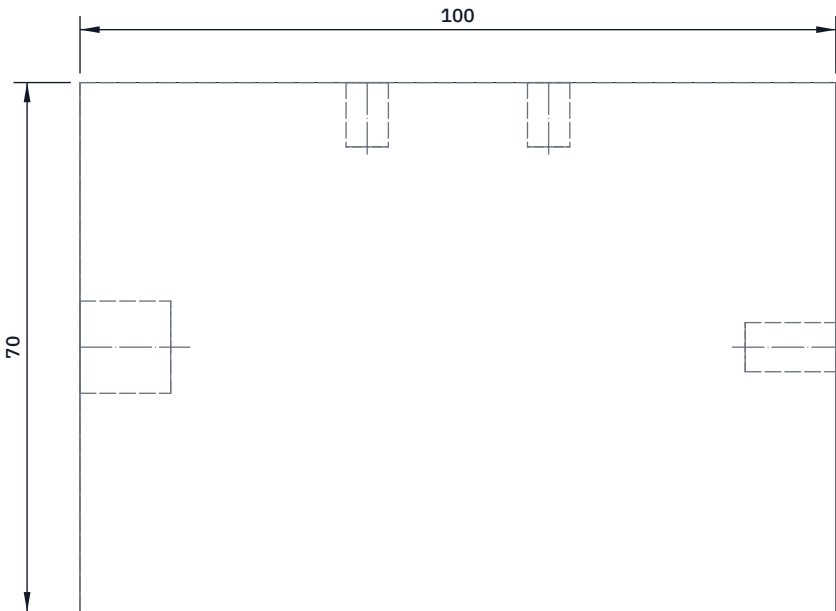

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

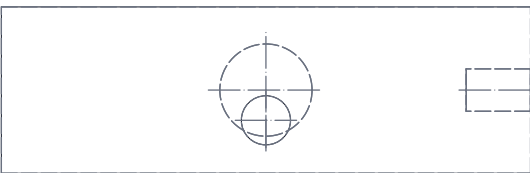

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

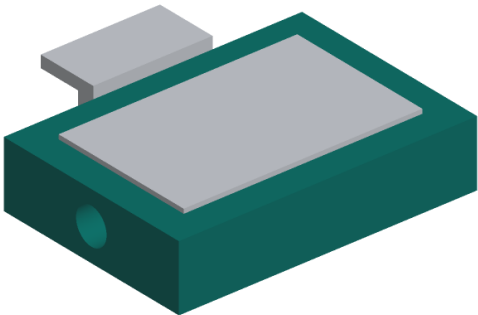

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print 100 x 70 x 22 mm, top face up, 4 walls, 30 % infill, with a 6 mm channel inside from the top centre to the left end hole.

Left end: 12.2 mm hole, 12 deep, centred, for the M12 cable gland.

Right end: 6.5 mm hole for the temperature probe lead, 4 mm below centre; fit a rubber grommet.

Clip face (the long side toward the module): two 5.6 mm holes, 8.5 deep, 12 mm each side of centre, mid height; press in M4 heat-set inserts with a soldering iron.

Bond the reference cell centred on the top face with neutral-cure silicone; lead its wires down the channel and seal the channel.

Check: the cell face is flat and parallel to the housing base.

PVTRACE			github.com/BoujeeEnjinia1701/pvtrace		
PVTrace sensor pod housing: making sketch					
DRAWING NO. PVT-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG or ASA, 3D printed, light grey					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	